## **SIEMENS**

Data sheet 3RW4028-1BB05



SIRIUS soft starter S0 38 A, 22 kW/500 V, 40  $^{\circ}\text{C}$  400-600 V AC, 24 V AC/DC Screw terminals

General technical data				
product brand name		SIRIUS		
product feature				
<ul> <li>integrated bypass contact system</li> </ul>		Yes		
• thyristors		Yes		
product function				
<ul> <li>intrinsic device protection</li> </ul>		Yes		
<ul> <li>motor overload protection</li> </ul>		Yes		
<ul> <li>evaluation of thermistor motor protection</li> </ul>		No		
<ul> <li>external reset</li> </ul>		Yes		
<ul> <li>adjustable current limitation</li> </ul>		Yes		
inside-delta circuit		No		
product component motor brake output		No		
insulation voltage rated value	V	600		
degree of pollution		3, acc. to IEC 60947-4-2		
reference code acc. to DIN EN 61346-2		Q		
reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		G		
Power Electronics				
product designation		Soft starter		
operational current				
<ul> <li>at 40 °C rated value</li> </ul>	Α	38		
<ul> <li>at 50 °C rated value</li> </ul>	Α	34		
at 60 °C rated value	Α	31		
yielded mechanical performance for 3-phase motors				
• at 400 V				
<ul> <li>at standard circuit at 40 °C rated value</li> </ul>	W	18 500		
• at 500 V				
— at standard circuit at 40 °C rated value	W	22 000		
operating frequency rated value	Hz	50 60		
relative negative tolerance of the operating frequency	%	-10		
relative positive tolerance of the operating frequency	%	10		
operating voltage at standard circuit rated value	V	400 600		
relative negative tolerance of the operating voltage at standard circuit	%	-15		
relative positive tolerance of the operating voltage at	%	10		
standard circuit				

adjustable motor current for motor overload protection minimum rated value	Α	23
continuous operating current [% of le] at 40 °C	%	115
power loss [W] at operational current at 40 °C during operation typical	W	19
Control circuit/ Control		
type of voltage of the control supply voltage		AC/DC
control supply voltage frequency 1 rated value	Hz	50
control supply voltage frequency 2 rated value	Hz	60
relative negative tolerance of the control supply	. %	-10
voltage frequency		
relative positive tolerance of the control supply voltage frequency	%	10
control supply voltage 1 at AC		
at 50 Hz rated value	V	24
at 60 Hz rated value	V	24
relative negative tolerance of the control supply voltage at AC at 50 Hz	%	-20
relative positive tolerance of the control supply voltage at AC at 50 Hz	%	20
relative negative tolerance of the control supply voltage at AC at 60 Hz	%	-20
relative positive tolerance of the control supply voltage at AC at 60 Hz	%	20
control supply voltage 1 at DC rated value	V	24
relative negative tolerance of the control supply	%	-20
relative positive tolerance of the control supply	%	20
voltage at DC	_	
display version for fault signal		red
Mechanical data		
size of engine control device		S0
width	mm	45
height	mm	125
depth	mm	155
fastening method		screw and snap-on mounting
mounting position		With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t
required spacing with side-by-side mounting		
• upwards	mm	60
at the side	mm	15
downwards	mm	40
wire length maximum	m	300
number of poles for main current circuit		3
Connections/ Terminals		
type of electrical connection		
type of electrical connection  • for main current circuit		screw-type terminals
for main current circuit     for auxiliary and control circuit		screw-type terminals
for main current circuit     for auxiliary and control circuit     number of NC contacts for auxiliary contacts		screw-type terminals 0
for main current circuit     for auxiliary and control circuit     number of NC contacts for auxiliary contacts     number of NO contacts for auxiliary contacts		screw-type terminals 0 2
for main current circuit     for auxiliary and control circuit     number of NC contacts for auxiliary contacts     number of NO contacts for auxiliary contacts     number of CO contacts for auxiliary contacts		screw-type terminals 0
for main current circuit     for auxiliary and control circuit     number of NC contacts for auxiliary contacts     number of NO contacts for auxiliary contacts     number of CO contacts for auxiliary contacts     type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point		screw-type terminals 0 2 1
for main current circuit     for auxiliary and control circuit     number of NC contacts for auxiliary contacts     number of NO contacts for auxiliary contacts     number of CO contacts for auxiliary contacts     type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point     solid		screw-type terminals 0 2 1 2x (1 2.5 mm²), 2x (2.5 6 mm²), max. 1x 10 mm²
for main current circuit     for auxiliary and control circuit     number of NC contacts for auxiliary contacts     number of NO contacts for auxiliary contacts     number of CO contacts for auxiliary contacts     type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point     solid     finely stranded with core end processing type of connectable conductor cross-sections at AWG		screw-type terminals 0 2 1
for main current circuit     for auxiliary and control circuit     number of NC contacts for auxiliary contacts     number of NO contacts for auxiliary contacts     number of CO contacts for auxiliary contacts     type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point     solid     finely stranded with core end processing		screw-type terminals 0 2 1 2x (1 2.5 mm²), 2x (2.5 6 mm²), max. 1x 10 mm²

type of connectable conductor cross-sections for auxiliary contacts		
• solid		2x (0.5 2.5 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>		2x (0.5 1.5 mm²)
type of connectable conductor cross-sections at AWG cables		
<ul> <li>for auxiliary contacts</li> </ul>		2x (20 14)
<ul> <li>for auxiliary contacts finely stranded with core end processing</li> </ul>		2x (20 16)
Ambient conditions		
installation altitude at height above sea level	m	5 000
environmental category		
<ul> <li>during transport acc. to IEC 60721</li> </ul>		2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
<ul> <li>during storage acc. to IEC 60721</li> </ul>		1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
<ul> <li>during operation acc. to IEC 60721</li> </ul>		3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
ambient temperature		
<ul> <li>during operation</li> </ul>	°C	-25 +60
during storage	°C	-40 +80
derating temperature	°C	40
protection class IP		IP20
Certificates/ approvals		

Certificates/ approvals

**General Product Approval** 

**EMC** 















**Miscellaneous** 



Special Test Certificate Type Test
Certificates/Test
Report



Marine / Shipping

other





Confirmation

UL/CSA ratings		
yielded mechanical performance [hp] for 3-phase AC motor		
• at 460/480 V		
<ul> <li>at standard circuit at 50 °C rated value</li> </ul>	hp	25
• at 575/600 V		
<ul> <li>at standard circuit at 50 °C rated value</li> </ul>	hp	30
contact rating of auxiliary contacts according to UL		B300 / R300
Further information		

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

Information- and Downloadcenter (Catalogs, Brochures,...)

## https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4028-1BB05


## Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4028-1BB05

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RW4028-1BB05

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW4028-1BB05&lang=en

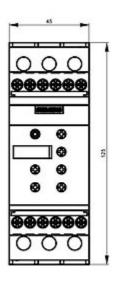

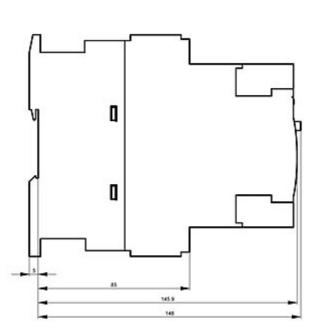



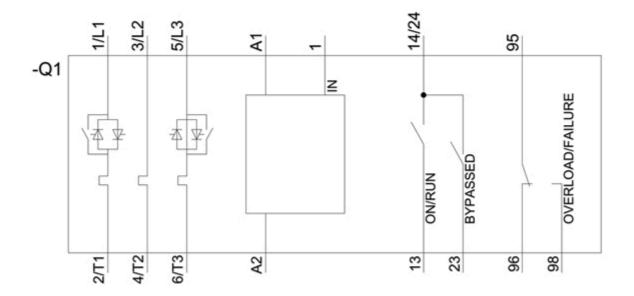

last modified: 12/15/2020 🖸