## SIEMENS

## Data sheet

## 3RW4046-2BB14



SIRIUS soft starter S3 80 A, 45 kW/400 V, 40  $^\circ\text{C}$  200-480 V AC, 110-230 V AC/DC spring-type terminals

General technical data		
product brand name		SIRIUS
product feature		
<ul> <li>integrated bypass contact system</li> </ul>		Yes
thyristors		Yes
product function		
<ul> <li>intrinsic device protection</li> </ul>		Yes
<ul> <li>motor overload protection</li> </ul>		Yes
<ul> <li>evaluation of thermistor motor protection</li> </ul>		No
external reset		Yes
<ul> <li>adjustable current limitation</li> </ul>		Yes
inside-delta circuit		No
product component motor brake output		No
insulation voltage rated value	V	600
degree of pollution		3, acc. to IEC 60947-4-2
reference code acc. to DIN EN 61346-2		Q
reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		G
Power Electronics		
product designation		Soft starter
operational current		
<ul> <li>at 40 °C rated value</li> </ul>	А	80
<ul> <li>at 50 °C rated value</li> </ul>	А	73
<ul> <li>at 60 °C rated value</li> </ul>	А	66
yielded mechanical performance for 3-phase motors • at 230 V		
<ul> <li>— at standard circuit at 40 °C rated value</li> <li>at 400 V</li> </ul>	W	22 000
<ul> <li>— at standard circuit at 40 °C rated value</li> </ul>	W	45 000
yielded mechanical performance [hp] for 3-phase AC motor at 200/208 V at standard circuit at 50 °C rated value	hp	20
operating frequency rated value	Hz	50 60
relative negative tolerance of the operating frequency	%	-10
relative positive tolerance of the operating frequency	%	10
operating voltage at standard circuit rated value	V	200 480
relative negative tolerance of the operating voltage at standard circuit	%	-15
relative positive tolerance of the operating voltage at	%	10

atendard aircuit	-	
standard circuit	- 0/	20
minimum load [%]	- % A	20 43
adjustable motor current for motor overload protection minimum rated value	A	45
continuous operating current [% of le] at 40 °C	%	115
power loss [W] at operational current at 40 °C during	W	12
operation typical		
Control circuit/ Control		
type of voltage of the control supply voltage		AC/DC
control supply voltage frequency 1 rated value	Hz	50
control supply voltage frequency 2 rated value	Hz	60
relative negative tolerance of the control supply voltage frequency	%	-10
relative positive tolerance of the control supply voltage frequency	%	10
control supply voltage 1 at AC at 50 Hz	V	110 230
control supply voltage 1 at AC at 60 Hz	V	110 230
relative negative tolerance of the control supply voltage at AC at 50 Hz	%	-15
relative positive tolerance of the control supply voltage at AC at 50 Hz	%	10
relative negative tolerance of the control supply voltage at AC at 60 Hz	%	-15
relative positive tolerance of the control supply voltage at AC at 60 Hz	%	10
control supply voltage 1 at DC	V	110 230
relative negative tolerance of the control supply voltage at DC	%	-15
relative positive tolerance of the control supply voltage at DC	%	10
display version for fault signal	-	red
Mechanical data		
Mechanical data size of engine control device		S3
	mm	S3 70
size of engine control device	mm mm	
size of engine control device width	-	70
size of engine control device width height depth fastening method	mm	70 170 190 screw and snap-on mounting
size of engine control device width height depth	mm	70 170 190
size of engine control device width height depth fastening method	mm	<ul> <li>70</li> <li>170</li> <li>190</li> <li>screw and snap-on mounting</li> <li>With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting</li> </ul>
size of engine control device width height depth fastening method mounting position	mm	<ul> <li>70</li> <li>170</li> <li>190</li> <li>screw and snap-on mounting</li> <li>With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting</li> </ul>
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting • upwards • at the side	mm	70         170         190         screw and snap-on mounting         With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/- 10° rotatable, with vertical mounting surface +/- 10° t         60         30
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards	mm mm mm mm	70         170         190         screw and snap-on mounting         With additional fan: With vertical mounting surface +/-90°         rotatable, with vertical mounting surface +/- 22.5° tiltable         to the front and back Without additional fan: With vertical         mounting surface +/-10° rotatable, with vertical mounting         surface +/- 10° t         60         30         40
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum	mm mm mm mm	70         170         190         screw and snap-on mounting         With additional fan: With vertical mounting surface +/-90°         rotatable, with vertical mounting surface +/- 22.5° tiltable         to the front and back Without additional fan: With vertical         mounting surface +/-10° rotatable, with vertical mounting         surface +/- 10° t         60         30         40         300
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum number of poles for main current circuit	mm mm mm mm	70         170         190         screw and snap-on mounting         With additional fan: With vertical mounting surface +/-90°         rotatable, with vertical mounting surface +/- 22.5° tiltable         to the front and back Without additional fan: With vertical         mounting surface +/-10° rotatable, with vertical mounting         surface +/- 10° t         60         30         40
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum number of poles for main current circuit Connections/ Terminals	mm mm mm mm	70         170         190         screw and snap-on mounting         With additional fan: With vertical mounting surface +/-90°         rotatable, with vertical mounting surface +/- 22.5° tiltable         to the front and back Without additional fan: With vertical         mounting surface +/-10° rotatable, with vertical mounting         surface +/- 10° t         60         30         40         300
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum number of poles for main current circuit Connections/ Terminals type of electrical connection	mm mm mm mm	70         170         190         screw and snap-on mounting         With additional fan: With vertical mounting surface +/-90°         rotatable, with vertical mounting surface +/- 22.5° tiltable         to the front and back Without additional fan: With vertical         mounting surface +/-10° rotatable, with vertical mounting         surface +/- 10° t         60         30         40         300         3
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum number of poles for main current circuit Connections/ Terminals type of electrical connection • for main current circuit	mm mm mm mm	70         170         190         screw and snap-on mounting         With additional fan: With vertical mounting surface +/-90°         rotatable, with vertical mounting surface +/- 22.5° tiltable         to the front and back Without additional fan: With vertical         mounting surface +/-10° rotatable, with vertical mounting         surface +/- 10° t         60         30         40         300         3         screw-type terminals
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum number of poles for main current circuit Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit	mm mm mm mm	70         170         190         screw and snap-on mounting         With additional fan: With vertical mounting surface +/-90°         rotatable, with vertical mounting surface +/- 22.5° tiltable         to the front and back Without additional fan: With vertical         mounting surface +/-10° rotatable, with vertical mounting         surface +/- 10° t         60         30         40         300         3         screw-type terminals         spring-loaded terminals
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum number of poles for main current circuit Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit number of NC contacts for auxiliary contacts	mm mm mm mm	70         170         190         screw and snap-on mounting         With additional fan: With vertical mounting surface +/-90°         rotatable, with vertical mounting surface +/-22.5° tiltable         to the front and back Without additional fan: With vertical         mounting surface +/-10° rotatable, with vertical mounting         surface +/- 10° t         60         30         40         300         3         screw-type terminals         spring-loaded terminals         0
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum number of poles for main current circuit Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts	mm mm mm mm	70         170         190         screw and snap-on mounting         With additional fan: With vertical mounting surface +/-90°         rotatable, with vertical mounting surface +/- 22.5° tiltable         to the front and back Without additional fan: With vertical         mounting surface +/-10° rotatable, with vertical mounting         surface +/- 10° t         60         30         40         300         3         screw-type terminals         spring-loaded terminals
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum number of poles for main current circuit Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit number of NC contacts for auxiliary contacts	mm mm mm mm	70         170         190         screw and snap-on mounting         With additional fan: With vertical mounting surface +/-90°         rotatable, with vertical mounting surface +/- 22.5° tiltable         to the front and back Without additional fan: With vertical mounting surface +/- 10° rotatable, with vertical mounting surface +/- 10° t         60         30         40         300         3         screw-type terminals         spring-loaded terminals         0         2         1
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum number of poles for main current circuit Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit number of NC contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point	mm mm mm mm	70         170         190         screw and snap-on mounting         With additional fan: With vertical mounting surface +/-90°         rotatable, with vertical mounting surface +/- 22.5° tiltable         to the front and back Without additional fan: With vertical         mounting surface +/-10° rotatable, with vertical mounting         surface +/- 10° t         60         30         40         300         3         screw-type terminals         spring-loaded terminals         0         2

main contacts for bo	x terminal using the	back				
clamping point	0					
<ul> <li>solid</li> </ul>				2x (2.5 16 mr	m²)	
<ul> <li>finely stranded w</li> </ul>	vith core end processi	ng		2.5 50 mm <sup>2</sup>		
<ul> <li>stranded</li> </ul>				10 70 mm²		
type of connectable of main contacts for boo points						
• solid				2x (2.5 16 mr	m²)	
<ul> <li>finely stranded v</li> </ul>	vith core end processi	ng		2x (2.5 35 mr	m²)	
<ul> <li>stranded</li> </ul>				2x (10 50 mn	1²)	
type of connectable of cables for main conta	acts for box terminal					
<ul> <li>using the back c</li> </ul>	lamping point			2x (10 1/0)		
<ul> <li>using the front cl</li> </ul>	lamping point			2x (10 1/0)		
<ul> <li>using both clamp</li> </ul>	ping points			10 2/0		
type of connectable of cable lug for main co		tions for DIN				
<ul> <li>finely stranded</li> </ul>				2 x (10 50 mr		
stranded				2x (10 70 mn	1 <sup>2</sup> )	
type of connectable of auxiliary contacts	conductor cross-sec	tions for			2)	
• solid				2x (0.25 2.5 r		
	vith core end processi	<u> </u>		2x (0.25 1.5 r	nm²)	
type of connectable of cables		tions at AWG		0 (7 4/0)		
for main contacts				2x (7 1/0)		
<ul> <li>for auxiliary cont</li> </ul>	tacts	_		2x (24 14)		
Ambient conditions			_			
installation altitude a	-	evel	m	5 000		
environmental catego	-					
<ul> <li>during transport</li> </ul>					2M2 (max. fall heigh	,
<ul> <li>during storage a</li> </ul>	cc. to IEC 60721				sional condensation) t not get inside the de	
<ul> <li>during operation</li> </ul>	acc. to IEC 60721			3K6 (no formati	-	sation), 3C3 (no salt
ambient temperature	1					
<ul> <li>during operation</li> </ul>	1		°C	-25 +60		
<ul> <li>during storage</li> </ul>			°C	-40 +80		
derating temperature	)		°C	40		
protection class IP				IP00		
Certificates/ approvals	5					
General Product App	oroval					EMC
Ceneral Product App	510441					Lino
SP.		(h)		EAC	EHC	
For use in hazardous	Declaration of Con	formity	т	est Certificates		Marine / Shipping
locations						
ATEX	<u>Miscellaneous</u>	CE EG-Konf.		<u>Type Test</u> <u>Certificates/Test</u> <u>Report</u>	<u>Special Test</u> <u>Certificate</u>	Lloyd's Register us
Marine / Shipping		other	F	Railway		





**Confirmation** 

004	ratings	
	launge	J

UL/COA railings		
yielded mechanical performance [hp] for 3-phase AC motor		
• at 220/230 V		
— at standard circuit at 50 °C rated value	hp	25
• at 460/480 V		
— at standard circuit at 50 °C rated value	hp	50
contact rating of auxiliary contacts according to UL		B300 / R300
Further information		

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4046-2BB14


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4046-2BB14


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RW4046-2BB14

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW4046-2BB14&lang=en

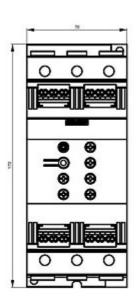

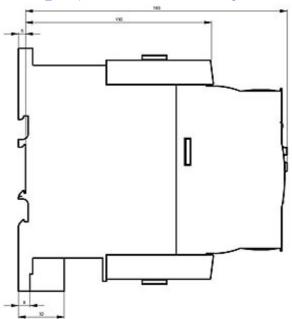

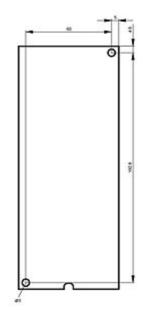

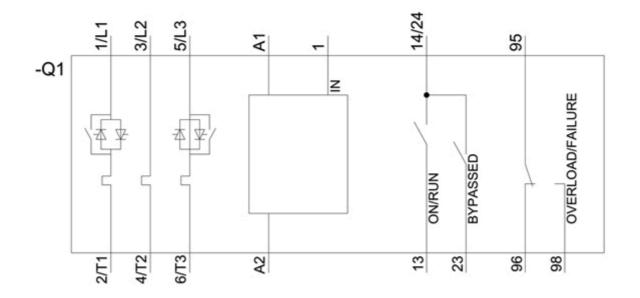

last modified:

12/15/2020 🖸