

Isolating Amplifier S1SD-1AI-1U.1


- 1-channel signal conditioner
- 24 V DC supply
- Input current and voltage sources
- Current and voltage output
- Accuracy 0.1 %
- Configurable by DIP switches
- Connection via screw terminals



Function

This signal conditioner provides the galvanic isolation between field circuits and control circuits.
 The device has an input for the following signals:
 - 0/4 mA ... 20 mA signal
 - 0/2 V ... 10 V signal
 The device provides the following standard signals at the output:
 - 0/4 mA ... 20 mA signal
 - 0/2 V ... 10 V signal
 The device is easily configured by the use of DIP switches.
 The device can be powered via terminals or Power Bus.

Connection

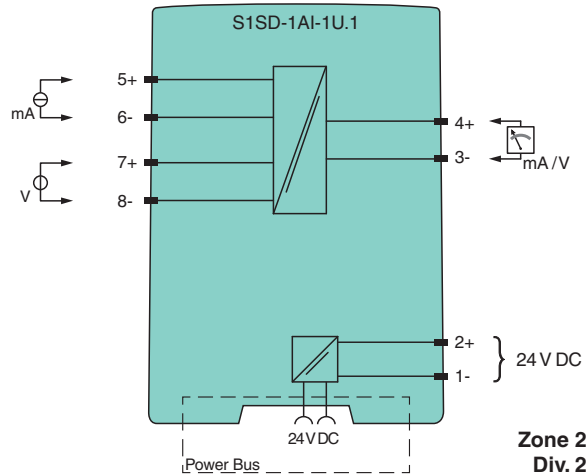

Release date: 2020-06-16 Date of issue: 2020-06-16 Filename: 276397_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com


USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Dimensions

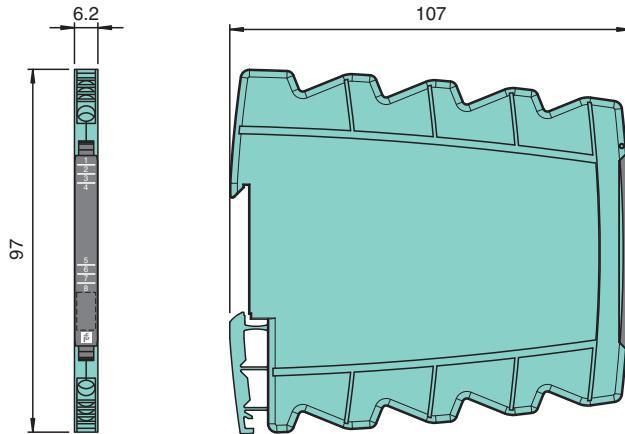

Technical Data

General specifications	
Signal type	Analog input
Operation time	MTBF: 536 a acc. to SN 29500 stationary continuous operating, average ambient temperature 40 °C (104 °F)
Supply	
Connection	Power Bus or terminals 1-, 2+
Rated voltage	U_r 16.8 ... 31.2 V DC
Power dissipation	0.6 W
Power consumption	0.7 W
Input	
Connection side	field side
Transmission range	linearity range: -1 ... 110 %
Input I	
Connection	terminals 5+, 6-
Input signal	0/4 ... 20 mA , max. 50 mA
Input resistance	$\leq 25 \Omega$
Input II	
Connection	terminals 7+, 8-
Input signal	0/2 ... 10 V , max. 30 V
Input resistance	$> 100 \text{ k}\Omega$
Output	
Connection side	control side
Connection	terminals 3-, 4+
Analog voltage output	0/2 ... 10 V , load $\geq 2 \text{ k}\Omega$
Analog current output	0/4 ... 20 mA , load $\leq 600 \Omega$
Ripple	$\leq 10 \text{ mV}_{\text{eff}}$
Transfer characteristics	
Accuracy	max. 0.1 % of full-scale value
Influence of ambient temperature	$< 100 \text{ ppm/K}$ of full-scale value
Frequency range	0 ... 10 Hz , 0 ... 100 Hz , 0 ... 5 kHz
Settling time	70 ms , 7 ms , 150 μs
Galvanic isolation	
Output/power supply	safe electrical isolation by reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V_{eff} test voltage 3 kV, 50 Hz, 1 min
Input/Other circuits	safe electrical isolation by reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V_{eff} test voltage 3 kV, 50 Hz, 1 min
Indicators/settings	
Control elements	DIP-switch

Release date: 2020-06-16 Date of issue: 2020-06-16 Filename: 276397_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

Technical Data

Configuration	via DIP switches
Labeling	space for labeling at the front
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
Conformity	
Degree of protection	IEC 60529:2001
Protection against electrical shock	EN 61010-1:2010
Ambient conditions	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Damaging gas	designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3
Mechanical specifications	
Degree of protection	IP20
Connection	screw terminals
Core cross-section	0.5 ... 2.5 mm ² (20 ... 14 AWG)
Mass	approx. 70 g
Dimensions	6.2 x 97 x 107 mm (0.24 x 3.82 x 4.21 inch) , housing type S1
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas	
Certificate	DEMKO 16 ATEX 1750X
Marking	Ⓜ II 3G Ex nA IIC T4 Gc
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-15:2010
International approvals	
UL approval	E106378
IECEX approval	IECEX UL 16.0116X
Approved for	Ex nA IIC T4 Gc
General information	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Assembly

Front view

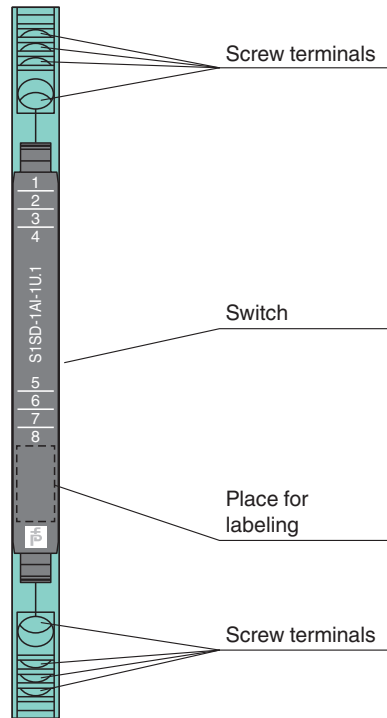

Accessories

	S1SD-2PF	Power feed module with screw terminals
	POWERBUS-SETL5.250	Power bus for 35 mm DIN mounting rail, height: 7.5 mm, length: 250 mm
	POWERBUS-SETH5.250	Power bus for 35 mm DIN mounting rail, height: 15 mm, length: 250 mm
	POWERBUS-COV.250	Cover for 35 mm DIN mounting rail, length: 250 mm
	POWERBUS-CAP	End Cap for Power Bus

Release date: 2020-06-16 Date of issue: 2020-06-16 Filename: 276397_eng.pdf

Configuration

Switch settings

Input	Output	S					
		1	2	3	4	5	6
0 mA ... 20 mA	0 mA ... 20 mA						
4 mA ... 20 mA					ON		
0 V ... 10 V							
2 V ... 10 V					ON		
0 mA ... 20 mA	4 mA ... 20 mA			ON			
4 mA ... 20 mA							
0 V ... 10 V				ON			
2 V ... 10 V							
0 mA ... 20 mA	0 V ... 10 V	ON	ON				
4 mA ... 20 mA		ON	ON		ON		
0 V ... 10 V		ON	ON				
2 V ... 10 V		ON	ON		ON		
0 mA ... 20 mA	2 V ... 10 V	ON	ON	ON			
4 mA ... 20 mA		ON	ON				
0 V ... 10 V		ON	ON	ON			
2 V ... 10 V		ON	ON				
Filter 5 kHz							
Filter 100 Hz						ON	
Filter 10 Hz							ON

Factory settings: all switches in position OFF

Release date: 2020-06-16 Date of issue: 2020-06-16 Filename: 276397_eng.pdf