

Pressure Measurement

Single-range transmitters for general applications

SITRANS P200 for gauge and absolute pressure

1

Overview



The SITRANS P200 pressure transmitter measures the gauge and absolute pressure of liquids, gases and vapors.

- Ceramic measuring cell
- Gauge and absolute measuring ranges 1 to 60 bar (15 to 1000 psi)
- For general applications

Benefits

- High measuring accuracy
- Rugged stainless steel enclosure
- High overload withstand capability
- For aggressive and non-aggressive media
- For measuring the pressure of liquids, gases and vapors
- Compact design

Application

The SITRANS P200 pressure transmitter for gauge and absolute pressure is used in the following industrial areas:

- Mechanical engineering
- Shipbuilding
- Power engineering
- Chemical industry
- Water supply

Design

Device structure without explosion protection

The pressure transmitter consists of a piezoresistive measuring cell with a diaphragm installed in a stainless steel enclosure. It can be used with a connector per EN 175301-803-A (IP65), a round plug M12 (IP67), a cable (IP67) or a Quickon cable quick screw connection (IP67) connected electrically. The output signal is between 4 and 20 mA or 0 and 10 V.


Device structure with explosion protection

The pressure transmitter consists of a piezoresistive measuring cell with a diaphragm installed in a stainless steel enclosure. It can be used with a connector per EN 175301-803-A (IP65) or a round plug M12 (IP67) connected electrically. The output signal is between 4 and 20 mA.

Function

The pressure transmitter measures the gauge and absolute pressure of liquids and gases as well as the level of liquids.

Mode of operation

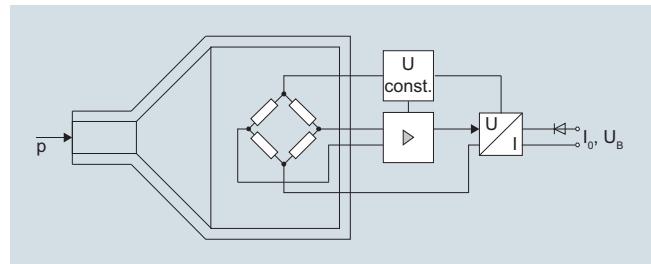

SITRANS P200 pressure transmitters (7MF1565...), functional diagram

The ceramic measuring cell has a thin-film resistance bridge to which the operating pressure p is transmitted through a ceramic diaphragm.

The voltage output from the measuring cell is converted by an amplifier into an output current of 4 to 20 mA or an output voltage of 0 to 10 V DC.

The output current and voltage are linearly proportional to the input pressure.

Pressure Measurement

Single-range transmitters for general applications

1

SITRANS P200 for gauge and absolute pressure

Technical specifications

Application	Liquids, gases and vapors	Design	Approx. 0.090 kg (0.198 lb) See dimension drawings
Gauge and absolute pressure measurement		Weight	
Mode of operation		Process connections	
Measuring principle	Piezo-resistive measuring cell (ceramic diaphragm)	Electrical connections	• Connector per EN 175301-803-A Form A with cable inlet M16x1.5 or 1/2-14 NPT or Pg 11 • M12 connector • 2 or 3-wire (0.5 mm ²) cable ($\varnothing \pm 5.4$ mm) • QuicKon cable quick screw connection
Measured variable	Gauge and absolute pressure	Wetted parts materials	Al ₂ O ₃ - 96 % Stainless steel, mat. No. 1.4404 (SST 316 L)
Inputs		• Measuring cell • Process connection • Gasket	• FPM (Standard) • Neoprene • Perbunan • EPDM
Measuring range		Non-wetted parts materials	Stainless steel, mat. No. 1.4404 (SST 316 L)
• Gauge pressure - Metric - US measuring range	1 ... 60 bar (15 ... 870 psi) 15 ... 1000 psi	• Enclosure • Rack • Cables	Plastic PVC
• Absolute pressure - Metric - US measuring range	0.6 ... 16 bar a (10 ... 232 psia) 10 ... 300 psia	Certificates and approvals	For gases of fluid group 1 and liquids of fluid group 1; complies with requirements of article 4, paragraph 3 (sound engineering practice)
Output			12/20010 GL19740 11 HH00 ABS_11_HG 789392_PDA
Current signal	4 ... 20 mA (U _B - 10 V)/0.02 A		BV 271007A0 BV
• Load	DC 7 ... 33 V (10 ... 30 V for Ex)		A 12553 ACS 15 ACC NY 360
• Auxiliary power U _B	0 ... 10 V DC ≥ 10 kΩ		№ TC RU C-DE.ГБ05.В.00732 OC НАИО «ЦСВЭ»
Voltage signal			
• Load	12 ... 33 V DC		
• Auxiliary power U _B	< 7 mA at 10 kΩ		
• Power consumption	0 ... 90 %		
Ratiometric output			
• Load	≥ 10 kΩ		
• Auxiliary power U _B	5 V DC ± 10 %		
• Power consumption	< 7 mA at 10 kΩ		
Characteristic curve	Linear rising		
Measuring accuracy			
Error in measurement at limit setting incl. hysteresis and reproducibility	• Typical: 0.25 % of full-scale value • Maximum: 0.5 % of full-scale value	Lloyd's Register of Shipping (LR) ¹⁾ Germanischer Lloyd (GL) ¹⁾ American Bureau of Shipping (ABS) ¹⁾ Bureau Veritas (BV) ¹⁾ Det Norske Veritas (DNV) ¹⁾ Drinking water approval (ACS) ¹⁾ EAC ¹⁾ Underwriters Laboratories (UL) ¹⁾ • for USA and Canada • worldwide	12/20010 GL19740 11 HH00 ABS_11_HG 789392_PDA BV 271007A0 BV A 12553 ACS 15 ACC NY 360 № TC RU C-DE.ГБ05.В.00732 OC НАИО «ЦСВЭ» UL 20110217 - E34453 IEC UL DK 21845
Step response time T ₉₉	< 5 ms		
Long-term stability			
• Lower range value and measuring span	0.25 % of full-scale value/year		
Influence of ambient temperature			
• Lower range value and measuring span	0.25 %/10 K of full-scale value		
• Influence of power supply	0.005 %/V		
Conditions of use			
Process temperature with gasket made of:			
• FPM (Standard)	-15 ... +125 °C (+5 ... +257 °F)	Intrinsic safety "i" (only with current output)	Ex II 1/2 G Ex ia IIC T4 Ga/Gb
• Neoprene	-35 ... +100 °C (-31 ... +212 °F)		Ex II 1/2 D Ex ia IIIC T125 °C Da/Db
• Perbunan	-20 ... +100 °C (-4 ... +212 °F)		SEV 10 ATEX 0146
• EPDM	-40 ... +145 °C (-40 ... +293 °F), usable for drinking water	EC type-examination certificate	U _i \leq 30 V DC; I _i \leq 100 mA; P _i \leq 0.75 W
Ambient temperature	-25 ... +85 °C (-13 ... +185 °F)	Connection to certified intrinsically-safe resistive circuits with maximum values:	
Storage temperature	-50 ... +100 °C (-58 ... +212 °F)		
Degree of protection (to EN 60529)	• IP 65 with connector per EN 175301-803-A • IP 67 with M12 connector • IP 67 with cable • IP 67 with cable quick screw connection • acc. IEC 61326-1/-2/-3 • acc. NAMUR NE21, only for ATEX versions and with a max. measuring deviation ≤ 1 %	Effective internal inductance and capacity for versions with plugs per EN 175301-803-A and M12	L _i = 0 nH; C _i = 0 nF
Electromagnetic compatibility			

¹⁾ For variants with output signal 0 ... 5 V and ratiometric output available soon.

Pressure Measurement

Single-range transmitters for general applications

SITRANS P200 for gauge and absolute pressure

1

Selection and ordering data**SITRANS P 200 pressure transmitters for pressure and absolute pressure for general applications**

Characteristic curve deviation typ. 0.25 %

Wetted parts materials: Ceramic and stainless steel + sealing material

Non-wetted parts materials: stainless steel

↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Measuring range	Overload limit		Burst pressure		Article No.	Order code
	Min.	Max.				
For gauge pressure						
0 ... 1 bar	(0 ... 14.5 psi)	-1 bar	(-14.5 psi)	2.5 bar	(36.26 psi)	> 2.5 bar (> 36.3 psi)
0 ... 1.6 bar	(0 ... 23.2 psi)	-1 bar	(-14.5 psi)	4 bar	(58.02 psi)	> 4 bar (> 58.0 psi)
0 ... 2.5 bar	(0 ... 36.3 psi)	-1 bar	(-14.5 psi)	6.25 bar	(90.65 psi)	> 6.25 bar (> 90.7 psi)
0 ... 4 bar	(0 ... 58.0 psi)	-1 bar	(-14.5 psi)	10 bar	(145 psi)	> 10 bar (> 145 psi)
0 ... 6 bar	(0 ... 87.0 psi)	-1 bar	(-14.5 psi)	15 bar	(217 psi)	> 15 bar (> 217 psi)
0 ... 10 bar	(0 ... 145 psi)	-1 bar	(-14.5 psi)	25 bar	(362 psi)	> 25 bar (> 362 psi)
0 ... 16 bar	(0 ... 232 psi)	-1 bar	(-14.5 psi)	40 bar	(580 psi)	> 40 bar (> 580 psi)
0 ... 25 bar	(0 ... 363 psi)	-1 bar	(-14.5 psi)	62.5 bar	(906 psi)	> 62.5 bar (> 906 psi)
0 ... 40 bar	(0 ... 580 psi)	-1 bar	(-14.5 psi)	100 bar	(1450 psi)	> 100 bar (> 1450 psi)
0 ... 60 bar	(0 ... 870 psi)	-1 bar	(-14.5 psi)	150 bar	(2175 psi)	> 150 bar (> 2175 psi)
Other version, add Order code and plain text: Measuring range: ... up to... bar (psi)						
3 BA						
3 BB						
3 BD						
3 BE						
3 BG						
3 CA						
3 CB						
3 CD						
3 CE						
3 CG						
9 AA						
H 1 Y						
For absolute pressure						
0 ... 0.6 bar a	(0 ... 8.7 psia)	0 bar a	(0 psia)	2.5 bar a	(36.26 psia)	> 2.5 bar a (> 36.3 psia)
0 ... 1 bar a	(0 ... 14.5 psia)	0 bar a	(0 psia)	2.5 bar a	(36.26 psia)	> 2.5 bar a (> 36.3 psia)
0 ... 1.6 bar a	(0 ... 23.2 psia)	0 bar a	(0 psia)	4 bar a	(58.02 psia)	> 4 bar a (> 58.0 psia)
0 ... 2.5 bar a	(0 ... 36.3 psia)	0 bar a	(0 psia)	6.25 bar a	(90.65 psia)	> 6.25 bar a (> 90.7 psia)
0 ... 4 bar a	(0 ... 58.0 psia)	0 bar a	(0 psia)	10 bar a	(145 psia)	> 10 bar a (> 145 psia)
0 ... 6 bar a	(0 ... 87.0 psia)	0 bar a	(0 psia)	15 bar a	(217 psia)	> 15 bar a (> 217 psia)
0 ... 10 bar a	(0 ... 145 psi)	0 bar a	(0 psia)	25 bar a	(362 psia)	> 25 bar a (> 362 psia)
0 ... 16 bar a	(0 ... 232 psi)	0 bar a	(0 psia)	40 bar a	(580 psia)	> 40 bar a (> 580 psia)
Other version, add Order code and plain text: Measuring range: ... up to ... mbar a (psia)						
9 AA						
H 2 Y						
Measuring ranges for gauge pressure						
0 ... 15 psi		-14.5 psi		35 psi		> 35 psi
3 ... 15 psi		-14.5 psi		35 psi		> 35 psi
0 ... 20 psi		-14.5 psi		50 psi		> 50 psi
0 ... 30 psi		-14.5 psi		80 psi		> 80 psi
0 ... 60 psi		-14.5 psi		140 psi		> 140 psi
0 ... 100 psi		-14.5 psi		200 psi		> 200 psi
0 ... 150 psi		-14.5 psi		350 psi		> 350 psi
0 ... 200 psi		-14.5 psi		550 psi		> 550 psi
0 ... 300 psi		-14.5 psi		800 psi		> 800 psi
0 ... 500 psi		-14.5 psi		1400 psi		> 1400 psi
0 ... 750 psi		-14.5 psi		2000 psi		> 2000 psi
0 ... 1000 psi		-14.5 psi		2000 psi		> 2000 psi
Other version, add Order code and plain text: Measuring range: ... up to ... psi						
9 AA						
H 1 Y						
Measuring ranges for absolute pressure						
0 ... 10 psia		0 psia		35 psia		> 35 psia
0 ... 15 psia		0 psia		35 psia		> 35 psia
0 ... 20 psia		0 psia		50 psia		> 50 psia
0 ... 30 psia		0 psia		80 psia		> 80 psia
0 ... 60 psia		0 psia		140 psia		> 140 psia
0 ... 100 psia		0 psia		200 psia		> 200 psia
0 ... 150 psia		0 psia		350 psia		> 350 psia
0 ... 200 psia		0 psia		550 psia		> 550 psia
0 ... 300 psia		0 psia		800 psia		> 800 psia
Other version, add Order code and plain text: Measuring range: ... up to ... psia						
9 AA						
H 2 Y						

Pressure Measurement

Single-range transmitters for general applications

1

SITRANS P200 for gauge and absolute pressure

	Article No.	Order code
Selection and ordering data		
SITRANS P 200 pressure transmitters for pressure and absolute pressure for general applications	7MF 1 5 6 5 -	
Accuracy typ. 0.25 %		
Wetted parts materials: Ceramic and stainless steel + sealing material		
Non-wetted parts materials: stainless steel		
Output signal		
4 ... 20 mA; two-wire system; power supply 7 ... 33 V DC (10 ... 30 V DC for ATEX versions)	0	
0 ... 10 V; three-wire system; power supply 12 ... 33 V DC	1 0	
0 ... 5 V; 3-wire system; auxiliary power 7 ... 33 V DC	2 0	
Ratiometric 10 ... 90 %; 3-wire system; auxiliary power 5 V DC ± 10 %	3 0	
Explosion protection (only 4 ... 20 mA)		
None	0	
With explosion protection Ex ia IIC T4	1	
Electrical connection		
Connector per DIN EN 175301-803-A, stuffing box thread M16 (with coupling)	1	
Round connector M12 per IEC 61076-2-101	2	
Connection via fixed mounted cable, 2 m (not for type of protection "Intrinsic safety i")	0 3	
Quiccon cable quick screw connection PG9 (not for type of protection "Intrinsic safety i")	0 4	
Connector per DIN EN 175301-803-A, stuffing box thread 1/2"-14 NPT (with coupling)	5	
Connector per DIN EN 175301-803-A, stuffing box thread PG11 (with coupling)	6	
Fixed mounted cable, length 5 m	0 7	
Special version	9	N 1 Y
Process connection		
G½" male per EN 837-1 (½" BSP male) (standard for metric pressure ranges mbar, bar)	A	
G½" male thread and G1/8" female thread	B	
G¼" male per EN 837-1 (¼" BSP male)	C	
7/16"-20 UNF male	D	
¼"-18 NPT male (standard for pressure ranges inH ₂ O and psi)	E	
¼"-18 NPT female	F	
½"-14 NPT male	G	
½"-14 NPT female	H	
7/16"-20 UNF female	J	
M20x1.5 male	P	
G1/4" to DIN 3852 Form E	Q	
G1/2" to DIN 3852 Form E	R	
Special version	Z	P 1 Y
Sealing material between sensor and enclosure		
Viton (FPM, standard)	A	
Neoprene (CR)	B	
Perbunan (NBR)	C	
EPDM	D	
Special version	Z	Q 1 Y
Version		
Standard version	1	
Further designs		
Supplement the Article No. with "-Z" and add Order code.		
Quality Inspection Certificate (5-point characteristic curve test) according to IEC 60770-2	C11	
Oxygen version, free of oil and degreased, max. operating pressure 60 bar, max. process temperature +85 °C (only in conjunction with the sealing material Viton between sensor and enclosure and not with explosion protection version)	E10	


Pressure Measurement

Single-range transmitters for general applications



SITRANS P200 for gauge and absolute pressure

1

Dimensional drawings

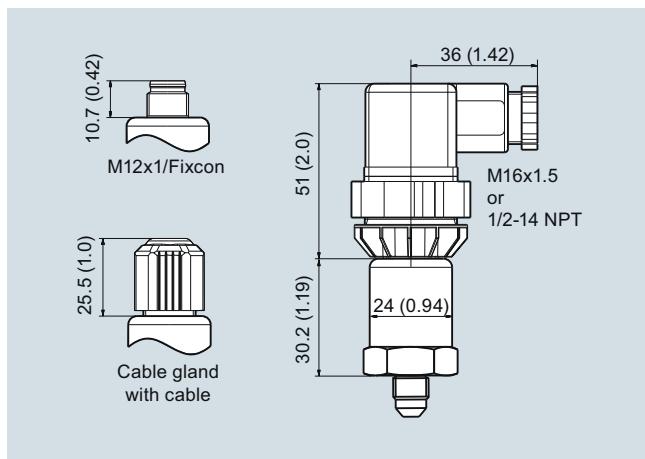

SITRANS P200, electrical connections, dimensions in mm (inch)

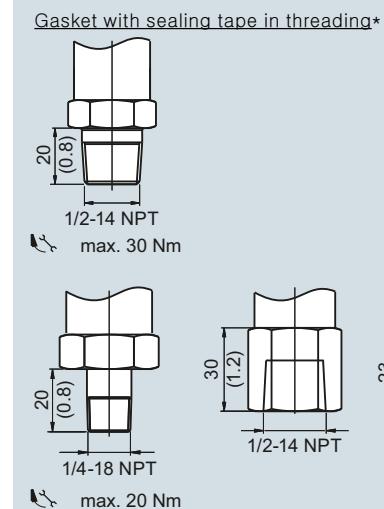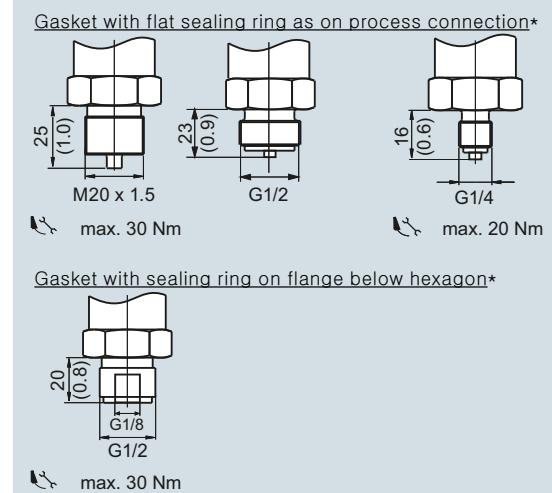

* Not included in product package









SITRANS P200, process connections, dimensions in mm (inch)

Pressure Measurement

Single-range transmitters for general applications

SITRANS P200 for gauge and absolute pressure

Schematics

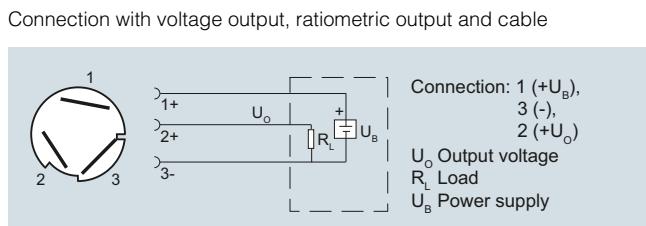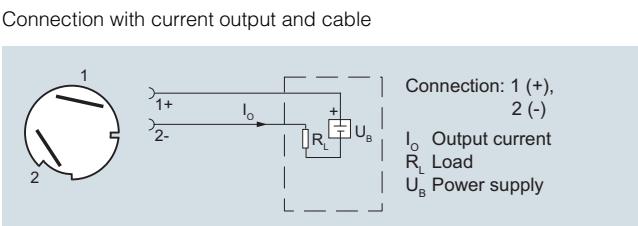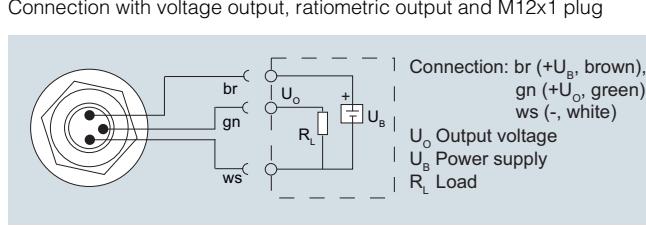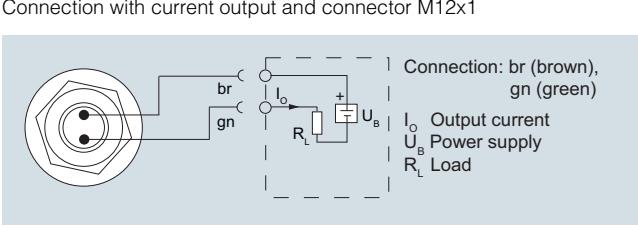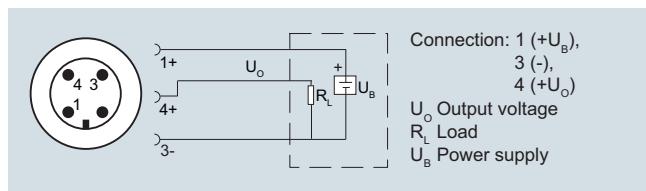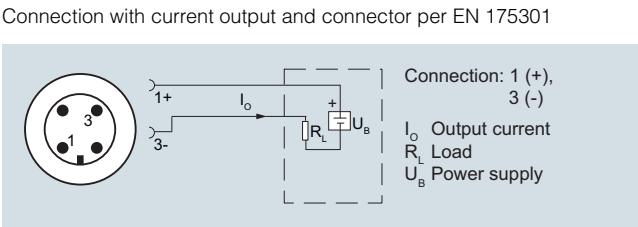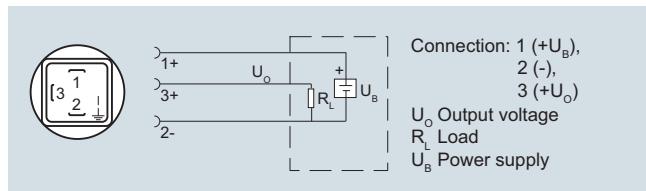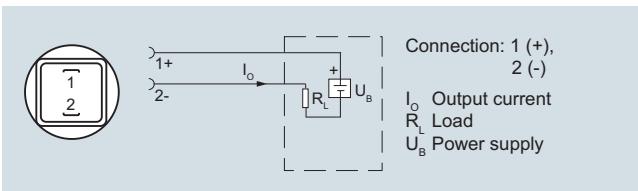

Version with explosion protection: 4 ... 20 mA

The grounding connection is conductively bonded to the transmitter enclosure

