

SIRIUS soft starter 200-480 V 143 A, 110-250 V AC Screw terminals



|                                      |   |
|--------------------------------------|---|
| <b>Product brand name</b>            | SIRIUS  |
| <b>Product category</b>              | Hybrid switching devices  |
| <b>Product designation</b>           | Soft starter  |
| <b>Product type designation</b>      | 3RW55   |
| <b>Manufacturer's article number</b> | <ul style="list-style-type: none"> <li>• of HMI-Modul high-feature usable <a href="#">3RW5980-0HF00</a></li> <li>• of communication module PROFINET standard usable <a href="#">3RW5980-0CS00</a></li> <li>• of communication module PROFINET high-feature usable <a href="#">3RW5950-0CH00</a></li> <li>• of communication module PROFIBUS usable <a href="#">3RW5980-0CP00</a></li> <li>• of communication module Modbus TCP usable <a href="#">3RW5980-0CT00</a></li> <li>• of communication module Modbus RTU usable <a href="#">3RW5980-0CR00</a></li> <li>• of communication module Ethernet/IP <a href="#">3RW5980-0CE00</a></li> <li>• of circuit breaker usable at 400 V <a href="#">3VA2220-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10</a></li> <li>• of circuit breaker usable at 400 V at inside-delta circuit <a href="#">3VA2325-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10</a></li> <li>• of the gG fuse usable up to 690 V <a href="#">3NA3244-6; Type of coordination 1, Iq = 65 kA</a></li> </ul> |

- of the gG fuse usable at inside-delta circuit up to 500 V
- of full range R fuse link for semiconductor protection usable up to 690 V
- of back-up R fuse link for semiconductor protection usable up to 690 V

[3NA3244-6; Type of coordination 1, I<sub>q</sub> = 65 kA](#)

[3NE1227-0; Type of coordination 2, I<sub>q</sub> = 65 kA](#)

[3NE3233; Type of coordination 2, I<sub>q</sub> = 65 kA](#)

#### General technical data

|   |  |
|---|--|
| <b>Starting voltage [%]</b>                             | 20 ... 100 %   |
| <b>Stopping voltage [%]</b>                             | 50 ... 50 %  |
| <b>Start-up ramp time of soft starter</b>               | 0 ... 360 s  |
| <b>Stopping time of soft starter</b>                    | 0 ... 360 s  |
| <b>Start torque [%]</b>                                 | 10 ... 100 %   |
| <b>Stopping torque [%]</b>                              | 10 ... 100 %   |
| <b>Torque limit [%]</b>                                 | 20 ... 200 %   |
| <b>Current limiting value [%] adjustable</b>            | 125 ... 800 %  |
| <b>Breakaway voltage [%] adjustable</b>                 | 40 ... 100 %   |
| <b>Breakaway time adjustable</b>                        | 0 ... 2 s  |
| <b>Number of parameter sets</b>                         | 3  |
| <b>Accuracy class acc. to IEC 61557-12</b>              | 5 %  |
| <b>Certificate of suitability</b>                       |  |
| • CE marking  | Yes  |
| • UL approval   | Yes  |
| • CSA-approval  | Yes  |
| <b>Product component</b>                                |  |
| • HMI-High Feature                                      | Yes  |
| • is supported HMI-High Feature                         | Yes  |
| <b>Product feature integrated bypass contact system</b> | Yes  |
| <b>Number of controlled phases</b>                      | 3  |
| <b>Trip class</b>                                       | CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2 |
| <b>Current unbalance limiting value [%]</b>             | 10 ... 60 %  |
| <b>Ground-fault monitoring limiting value [%]</b>       | 10 ... 95 %  |
| <b>Recovery time after overload trip adjustable</b>     | 60 ... 1 800 s   |
| <b>Buffering time in the event of power failure</b>     |  |
| • for main current circuit                              | 100 ms   |
| • for control circuit                                   | 100 ms   |
| <b>Idle time adjustable</b>                             | 0 ... 255 s  |
| <b>Insulation voltage</b>                               |  |
| • rated value   | 480 V  |
| <b>Degree of pollution</b>                              | 3, acc. to IEC 60947-4-2                                     |
| <b>Impulse voltage rated value</b>                      | 6 kV   |
| <b>Blocking voltage of the thyristor maximum</b>        | 1 400 V  |
| <b>Service factor</b>                                   | 1.15   |
| <b>Surge voltage resistance rated value</b>             | 6 kV   |

|  |  |
|--|--|
| <b>maximum permissible voltage for safe isolation</b>  |  |
| <ul style="list-style-type: none"> <li>• between main and auxiliary circuit</li> </ul>   | 480 V; does not apply for thermistor connection  |
| <b>Protection class IP</b>   | IP00   |
| <b>Usage category acc. to IEC 60947-4-2</b>  | AC 53a   |
| <b>Shock resistance</b>  | 15 g / 11 ms, from 6 g / 11 ms with potential contact lifting  |
| <b>Vibration resistance</b>  | 15 mm up to 6 Hz; 2 g up to 500 Hz   |
| <b>Reference code acc. to DIN EN 81346-2</b>   | Q  |
| <b>Product function</b>  |  |
| <ul style="list-style-type: none"> <li>• ramp-up (soft starting)</li> <li>• ramp-down (soft stop)</li> <li>• breakaway pulse</li> <li>• Adjustable current limitation</li> <li>• creep speed in both directions of rotation</li> <li>• pump ramp down</li> <li>• DC braking</li> <li>• motor heating</li> <li>• slave pointer function</li> <li>• trace function</li> <li>• Intrinsic device protection</li> <li>• motor overload protection</li> </ul>  | <p>Yes</p> <p>Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit.</p> |
| <ul style="list-style-type: none"> <li>• Evaluation of thermistor motor protection</li> <li>• inside-delta circuit</li> <li>• Auto-reset</li> <li>• Manual RESET</li> <li>• remote reset</li> <li>• communication function</li> <li>• operating measured value display</li> <li>• event list</li> <li>• error logbook</li> <li>• via software parameterizable</li> <li>• via software configurable</li> <li>• screw terminal</li> <li>• spring-type terminal</li> <li>• PROFINergy</li> <li>• firmware update</li> <li>• removable terminal for control circuit</li> <li>• voltage ramp</li> <li>• torque control</li> </ul> | <p>Yes; Type A PTC or Klixon / Thermoclick</p> <p>Yes</p> <p>No</p> <p>Yes; in connection with the PROFINET Standard and PROFINET High-Feature communication modules</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p>                         |

|  |   |
|--|---|
| • combined braking                           | Yes                                     |
| • analog output                              | Yes; 4 ... 20 mA (default) / 0 ... 10 V |
| • programmable control inputs/outputs        | Yes                                     |
| • condition monitoring                       | Yes                                     |
| • automatic parameterisation                 | Yes                                     |
| • application wizards                        | Yes                                     |
| • alternative run-down                       | Yes                                     |
| • emergency operation mode                   | Yes                                     |
| • reversing operation                        | Yes                                     |
| • soft starting at heavy starting conditions | Yes                                     |

## Power Electronics

|   |                                      |
|---|--------------------------------------|
| <b>Operating current</b>  |                                      |
| • at 40 °C rated value  | 143 A                                |
| • at 40 °C rated value minimum  | 29 A                                 |
| • at 50 °C rated value  | 128 A                                |
| • at 60 °C rated value  | 118 A                                |
| <b>Operating current at inside-delta circuit</b>                                    |                                      |
| • at 40 °C rated value  | 248 A                                |
| • at 50 °C rated value  | 222 A                                |
| • at 60 °C rated value  | 204 A                                |
| <b>Operating voltage</b>  |                                      |
| • rated value   | 200 ... 480 V                        |
| • at inside-delta circuit rated value   | 200 ... 480 V                        |
| <b>Relative negative tolerance of the operating voltage</b>                         | -15 %                                |
| <b>Relative positive tolerance of the operating voltage</b>                         | 10 %                                 |
| <b>Relative negative tolerance of the operating voltage at inside-delta circuit</b> | -15 %                                |
| <b>Relative positive tolerance of the operating voltage at inside-delta circuit</b> | 10 %                                 |
| <b>Operating power for three-phase motors</b>                                       |                                      |
| • at 230 V at 40 °C rated value   | 37 kW                                |
| • at 230 V at inside-delta circuit at 40 °C rated value                             | 75 kW                                |
| • at 400 V at 40 °C rated value   | 75 kW                                |
| • at 400 V at inside-delta circuit at 40 °C rated value                             | 132 kW                               |
| <b>Operating frequency 1 rated value</b>  | 50 Hz                                |
| <b>Operating frequency 2 rated value</b>  | 60 Hz                                |
| <b>Relative negative tolerance of the operating frequency</b>                       | -10 %                                |
| <b>Relative positive tolerance of the operating frequency</b>                       | 10 %                                 |
| <b>Minimum load [%]</b>   | 10 %; Relative to set I <sub>e</sub> |

|  |  |
|--|--|
| <b>Power loss [W] for rated value of the current at AC</b> |  |
| • at 40 °C to power-up                                     | 43 W   |
| • at 50 °C to power-up                                     | 38 W   |
| • at 60 °C to power-up                                     | 35 W   |
| <b>Power loss [W] at AC at AC</b>                          |  |
| • at 40 °C during startup                                  | 2 115 W  |
| • at 50 °C during startup                                  | 1 795 W  |
| • at 60 °C during startup                                  | 1 593 W  |
| <b>Type of the motor protection</b>                        | Electronic, tripping in the event of thermal overload of the motor |

### Control circuit/ Control

|   |  |
|---|--|
| <b>Type of voltage of the control supply voltage</b>                            | AC   |
| <b>Control supply voltage at AC</b>   |  |
| • at 50 Hz  | 110 ... 250 V  |
| • at 60 Hz  | 110 ... 250 V  |
| <b>Relative negative tolerance of the control supply voltage at AC at 50 Hz</b> | -15 %  |
| <b>Relative positive tolerance of the control supply voltage at AC at 50 Hz</b> | 10 %   |
| <b>Relative negative tolerance of the control supply voltage at AC at 60 Hz</b> | -15 %  |
| <b>Relative positive tolerance of the control supply voltage at AC at 60 Hz</b> | 10 %   |
| <b>Control supply voltage frequency</b>   | 50 ... 60 Hz   |
| <b>Relative negative tolerance of the control supply voltage frequency</b>      | -10 %  |
| <b>Relative positive tolerance of the control supply voltage frequency</b>      | 10 %   |
| <b>Control supply current in standby mode rated value</b>                       | 100 mA   |
| <b>Holding current in the by-pass mode operating rated value</b>                | 180 mA   |
| <b>Starting current at close of by-pass contact maximum</b>                     | 0.8 A  |
| <b>Inrush current peak at connect of control supply voltage maximum</b>         | 43 A   |
| <b>Duration of inrush current peak at connect of control supply voltage</b>     | 1.6 ms   |
| <b>Design of the overvoltage protection</b>                                     | Varistor   |
| <b>Design of short-circuit protection for control circuit</b>                   | 4 A gG fuse (I <sub>cu</sub> =1 kA), 6 A quick-acting fuse (I <sub>cu</sub> =1 kA), C1 miniature circuit breaker (I <sub>cu</sub> = 600 A), C6 miniature circuit breaker (I <sub>cu</sub> = 300 A); Is not part of scope of supply |

### Inputs/ Outputs

|   |                                       |
|---|---------------------------------------|
| <b>Number of digital inputs</b>                   | 4                                     |
| • parameterizable                                 | 4                                     |
| <b>Number of inputs for thermistor connection</b> | 1; Type A PTC or Klixon / Thermoclick |
| <b>Number of digital outputs</b>                  | 4                                     |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• parameterizable</li> </ul>               | 3   |
| <ul style="list-style-type: none"> <li>• not parameterizable</li> </ul>           | 1   |
| <b>Digital output version</b>   | 3 normally-open contacts (NO) / 1 changeover contact (CO) |
| <b>Number of analog outputs</b>   | 1   |
| <b>Switching capacity current of the relay outputs</b>                            |   |
| <ul style="list-style-type: none"> <li>• at AC-15 at 250 V rated value</li> </ul> | 3 A   |
| <ul style="list-style-type: none"> <li>• at DC-13 at 24 V rated value</li> </ul>  | 1 A   |

### Installation/ mounting/ dimensions

|   |  |
|---|--|
| <b>Mounting position</b>  | Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°) |
| <b>Mounting type</b>  | screw fixing   |
| <b>Height</b>   | 306 mm   |
| <b>Width</b>  | 185 mm   |
| <b>Depth</b>  | 203 mm   |
| <b>Required spacing with side-by-side mounting</b>              |  |
| <ul style="list-style-type: none"> <li>• forwards</li> </ul>    | 10 mm  |
| <ul style="list-style-type: none"> <li>• Backwards</li> </ul>   | 0 mm   |
| <ul style="list-style-type: none"> <li>• upwards</li> </ul>     | 100 mm   |
| <ul style="list-style-type: none"> <li>• downwards</li> </ul>   | 75 mm  |
| <ul style="list-style-type: none"> <li>• at the side</li> </ul> | 5 mm   |
| <b>Installation altitude at height above sea level maximum</b>  | 5 000 m; Derating as of 1000 m, see catalog                                |
| <b>Weight without packaging</b>                                 | 8.5 kg   |

### Connections/ Terminals

|  |  |
|--|--|
| <b>Type of electrical connection</b>   |  |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>                                     | busbar connection  |
| <ul style="list-style-type: none"> <li>• for control circuit</li> </ul>  | screw-type terminals   |
| <b>Width of connection bar maximum</b>   | 25 mm  |
| <b>Type of connectable conductor cross-sections</b>  |  |
| <ul style="list-style-type: none"> <li>• for DIN cable lug for main contacts stranded</li> </ul>                 | 2x (16 ... 95 mm <sup>2</sup> )                                      |
| <ul style="list-style-type: none"> <li>• for DIN cable lug for main contacts finely stranded</li> </ul>          | 2x (25 ... 120 mm <sup>2</sup> )                                     |
| <b>Type of connectable conductor cross-sections</b>  |  |
| <ul style="list-style-type: none"> <li>• for control circuit solid</li> </ul>                                    | 1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> ) |
| <ul style="list-style-type: none"> <li>• for control circuit finely stranded with core end processing</li> </ul> | 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> ) |
| <ul style="list-style-type: none"> <li>• at AWG conductors for control circuit solid</li> </ul>                  | 1x (20 ... 12), 2x (20 ... 14)                                       |
| <b>Wire length</b>   |  |
| <ul style="list-style-type: none"> <li>• between soft starter and motor maximum</li> </ul>                       | 800 m  |
| <ul style="list-style-type: none"> <li>• at the digital inputs at DC maximum</li> </ul>                          | 1 000 m  |
| <b>Tightening torque</b>   |  |
| <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> </ul>                  | 10 ... 14 N·m  |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• for auxiliary and control contacts with screw-type terminals</li> </ul>  | 0.8 ... 1.2 N·m                        |
| <b>Tightening torque [lbf·in]</b> <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> <li>• for auxiliary and control contacts with screw-type terminals</li> </ul> | 89 ... 124 lbf·in<br>7 ... 10.3 lbf·in |

### Ambient conditions

|  |   |
|--|---|
| <b>Ambient temperature</b> <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage and transport</li> </ul>  | -25 ... +60 °C; Please observe derating at temperatures of 40 °C or above<br>-40 ... +80 °C   |
| <b>Environmental category</b> <ul style="list-style-type: none"> <li>• during operation acc. to IEC 60721</li> <li>• during storage acc. to IEC 60721</li> <li>• during transport acc. to IEC 60721</li> </ul> | 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6<br>1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4<br>2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) |
| EMC emitted interference   | acc. to IEC 60947-4-2: Class A  |

### Communication/ Protocol

|  |  |
|--|--|
| <b>Communication module is supported</b> <ul style="list-style-type: none"> <li>• PROFINET standard</li> <li>• PROFINET high-feature</li> <li>• EtherNet/IP</li> <li>• Modbus RTU</li> <li>• Modbus TCP</li> <li>• PROFIBUS</li> </ul> | Yes<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes |
|--|--|

### UL/CSA ratings

|  |   |
|--|---|
| <b>Manufacturer's article number</b> <ul style="list-style-type: none"> <li>• of circuit breaker               <ul style="list-style-type: none"> <li>— usable for Standard Faults at 460/480 V according to UL</li> <li>— usable for High Faults at 460/480 V according to UL</li> <li>— usable for Standard Faults at 460/480 V at inside-delta circuit according to UL</li> <li>— usable for High Faults at 460/480 V at inside-delta circuit according to UL</li> <li>— usable for Standard Faults at 575/600 V according to UL</li> <li>— usable for High Faults at 575/600 V at inside-delta circuit according to UL</li> <li>— usable for Standard Faults at 575/600 V at inside-delta circuit according to UL</li> </ul> </li> </ul> | Siemens type: 3VA52, max. 250 A; Iq = 10 kA<br>Siemens type: 3VA52, max. 250 A; Iq max = 65 kA<br>Siemens type: 3VA52, max. 250 A; Iq = 10 kA<br>Siemens type: 3VA52, max. 250 A; Iq max = 65 kA<br>Siemens type: 3VA52, max. 250 A; Iq = 10 kA<br>Siemens type: 3VA52, max. 250 A; Iq max = 65 kA<br>Siemens type: 3VA52, max. 250 A; Iq = 10 kA |
|--|---|

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• of the fuse <ul style="list-style-type: none"> <li>— usable for Standard Faults up to 575/600 V according to UL</li> <li>— usable for High Faults up to 575/600 V according to UL</li> <li>— usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL</li> <li>— usable for High Faults at inside-delta circuit up to 575/600 V according to UL</li> </ul> </li> </ul>         | Type: Class RK5 / K5, max. 350 A; Iq = 10 kA<br><br>Type: Class J / L, max. 350 A; Iq = 100 kA<br><br>Type: Class RK5 / K5, max. 350 A; Iq = 10 kA<br><br>Type: Class J / L, max. 350 A; Iq = 100 kA |
| <b>Operating power [hp] for three-phase motors</b> <ul style="list-style-type: none"> <li>• at 200/208 V at 50 °C rated value</li> <li>• at 220/230 V at 50 °C rated value</li> <li>• at 460/480 V at 50 °C rated value</li> <li>• at 200/208 V at inside-delta circuit at 50 °C rated value</li> <li>• at 220/230 V at inside-delta circuit at 50 °C rated value</li> <li>• at 460/480 V at inside-delta circuit at 50 °C rated value</li> </ul> | 40 hp<br>40 hp<br>100 hp<br>75 hp<br>75 hp<br>150 hp   |
| <b>Contact rating of auxiliary contacts according to UL</b>   | R300-B300  |

#### Safety related data

|                                      |                       |
|--------------------------------------|-----------------------|
| <b>Electromagnetic compatibility</b> | acc. to IEC 60947-4-2 |
|--------------------------------------|-----------------------|

#### ATEX

|   |  |
|---|--|
| <b>Certificate of suitability</b> <ul style="list-style-type: none"> <li>• ATEX</li> <li>• IECEx</li> <li>• according to ATEX directive 2014/34/EU</li> </ul> | Yes<br>Yes<br>BVS 18 ATEX F 003 X  |
| <b>Type of protection according to ATEX directive 2014/34/EU</b>  | II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb],<br>II (2)D [Ex tb Db] [Ex pxb Db],<br>I (M2) [Ex db Mb] |
| <b>Hardware fault tolerance acc. to IEC 61508 relating to ATEX</b>  | 0  |
| <b>PFDAvg with low demand rate acc. to IEC 61508 relating to ATEX</b>   | 0.008  |
| <b>PFHD with high demand rate acc. to EN 62061 relating to ATEX</b>   | 0.0000005 1/h  |
| <b>Safety Integrity Level (SIL) acc. to IEC 61508 relating to ATEX</b>  | SIL1   |
| <b>T1 value for proof test interval or service life acc. to IEC 61508 relating to ATEX</b>  | 3 y  |

#### Certificates/ approvals

|                          |     |                                |
|--------------------------|-----|--------------------------------|
| General Product Approval | EMC | For use in hazardous locations |
|--------------------------|-----|--------------------------------|



|                           |                   |                   |
|---------------------------|-------------------|-------------------|
| Declaration of Conformity | Test Certificates | Marine / Shipping |
|---------------------------|-------------------|-------------------|



[Miscellaneous](#)

[Type Test Certificates/Test Report](#)



|                   |       |
|-------------------|-------|
| Marine / Shipping | other |
|-------------------|-------|



[Confirmation](#)

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5535-6HA14>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5535-6HA14>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5535-6HA14>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**



[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW5535-6HA14&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5535-6HA14&lang=en)


**Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current**

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5535-6HA14/char>

**Characteristic: Installation altitude**

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5535-6HA14&objecttype=14&gridview=view1>

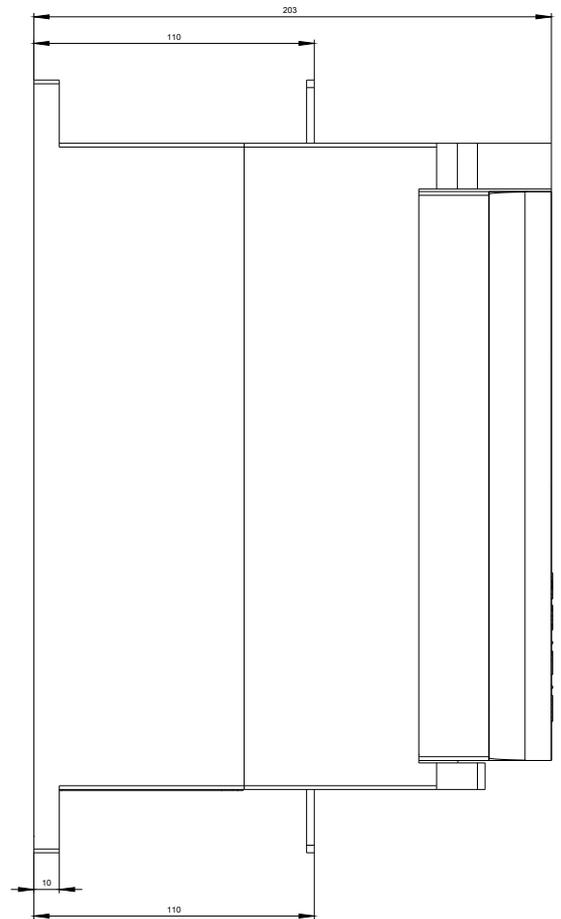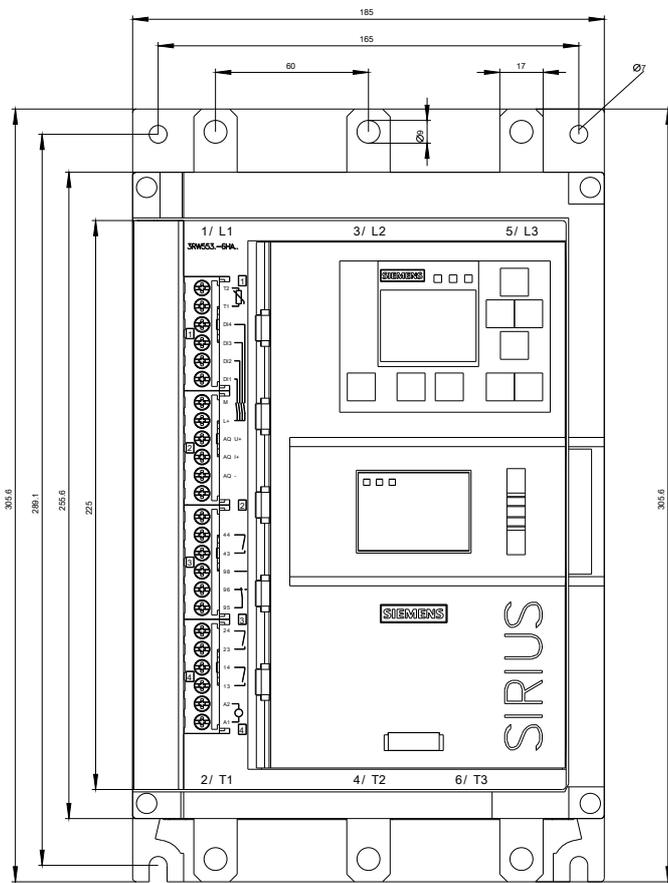

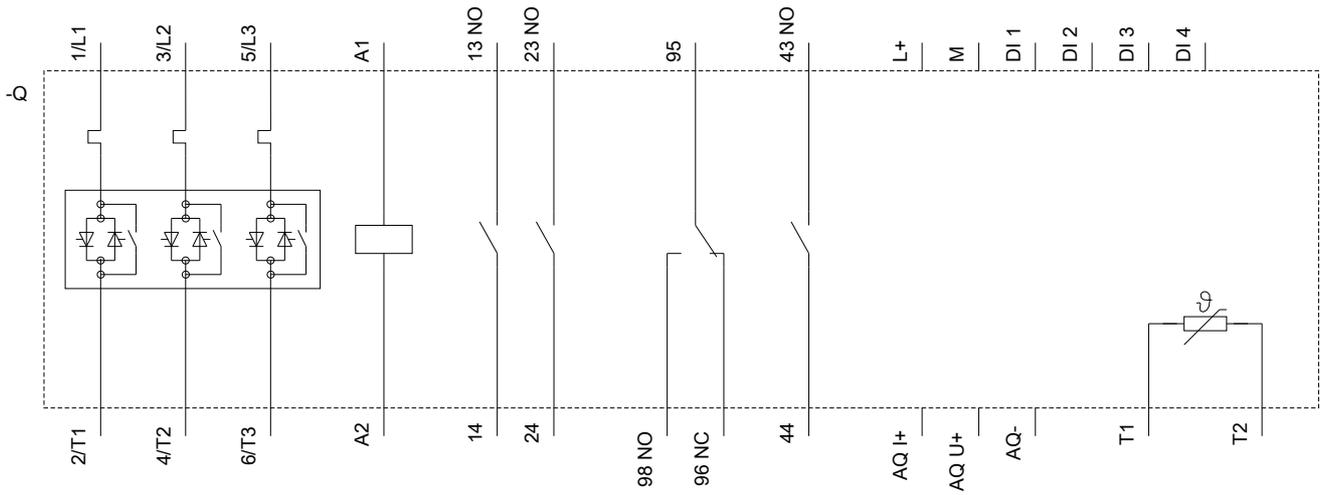

**last modified:**

05/04/2020