

## Type 2 surge arrester - BLT-T2-320-UT - 2906100

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Type 2 surge arrester for universal mounting in lights and cable connection boxes. Specifically for insulation class II with optical fault indication. Installation in branch or through wiring. Version: 230 V AC

### Why buy this product

- L' signalizes the failure of the surge protective device due to disconnection of the power supply to the lights.
- Universal use for street, tunnel or object lighting
- Flexible installation
- Fixed via integrated elongated holes
- compact design
- Optical status indicator
- Stub or through-wiring connection
- Double or reinforced insulation



### Key Commercial Data

Packing unit	10 STK
Minimum order quantity	10 STK
GTIN	
GTIN	4055626058078
Weight per Piece (excluding packing)	40.470 g
Custom tariff number	85363030
Country of origin	China

### Technical data

#### Dimensions

Height	56 mm
Width	36.5 mm
Depth	34 mm

#### Ambient conditions

# Type 2 surge arrester - BLT-T2-320-UT - 2906100

## Technical data

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m (amsl (above mean sea level))
Permissible humidity (operation)	5 % ... 95 %

### General

IEC test classification	II / III
	T2 / T3
EN type	T2 / T3
IEC power supply system	TT
Mode of protection	L-N
Mounting type	4 mm screw
Color	light grey RAL 7035
Housing material	PA 6.6
Degree of pollution	2
Flammability rating according to UL 94	V-0
Protection class	II
Type	Installation module
Surge protection fault message	optical

### Protective circuit

Nominal voltage $U_N$	100 V AC ... 277 V AC
Nominal frequency $f_N$	50 Hz (60 Hz)
Maximum continuous voltage $U_C$	320 V AC
Rated load current $I_L$	16 A
Nominal discharge current $I_n$ (8/20) $\mu$ s	5 kA
Maximum discharge current $I_{max}$ (8/20) $\mu$ s	10 kA
Combination wave $U_{oc}$	10 kV
Short-circuit current rating $I_{SCCR}$	3 kA
Voltage protection level $U_p$	≤ 1.3 kV
Residual voltage $U_{res}$	≤ 1.3 kV (at $I_n$ )
	≤ 1.3 kV (at $U_{oc}$ )
TOV behavior at $U_T$	400 V AC (5 s / withstand mode)
	528 V AC (120 min / safe failure mode)
Response time $t_A$	≤ 25 ns
Max. backup fuse with V-type through wiring	16 A (MCB B/C)
Max. backup fuse with branch wiring	16 A (MCB B/C)
Combination wave $U_{oc}$	10 kV

### Connection data

Connection method	Screw terminal blocks
-------------------	-----------------------

# Type 2 surge arrester - BLT-T2-320-UT - 2906100

## Technical data

### Connection data


Screw thread	M3
Tightening torque	0.6 Nm
2 conductors with same cross section, stranded min.	0.2 mm <sup>2</sup>
2 conductors with same cross section, stranded max.	1.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
2 conductors with same cross section, solid min.	0.2 mm <sup>2</sup>
2 conductors with same cross section, solid max.	1.5 mm <sup>2</sup>
Conductor cross section solid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>

### Standards and Regulations


Standards/regulations	IEC 61643-11 2011
	EN 61643-11 2012

## Drawings


Circuit diagram



Drilling diagram



Dimensional drawing

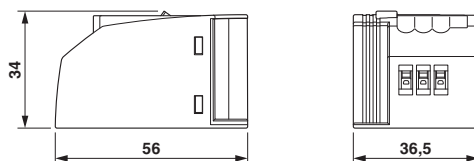

## Classifications

eCl@ss

eCl@ss 5.1	27130801
eCl@ss 6.0	27130805
eCl@ss 8.0	27130805
eCl@ss 9.0	27130805

# Type 2 surge arrester - BLT-T2-320-UT - 2906100

## Classifications

### ETIM

ETIM 5.0	EC000941
ETIM 6.0	EC000941

### UNSPSC

UNSPSC 13.2	39121620
-------------	----------

## Approvals

### Approvals

#### Approvals

KEMA-KEUR / CCA / IECCEB Scheme / EAC

#### Ex Approvals

### Approval details

KEMA-KEUR		<a href="http://www.dekra-certification.com">http://www.dekra-certification.com</a>	2179938.01
-----------	--	---	------------

CCA			NTR-NL 7418
-----	--	--	-------------

IECEE CB Scheme		<a href="http://www.iecee.org/">http://www.iecee.org/</a>	NL-36565
-----------------	--	---	----------

EAC			RU C- DE.A*30.B01561
-----	--	--	-------------------------