

Single relay - REL-IR2/LDP-220DC/2X21 - 2903665

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Plug-in industrial relay with power contacts, 2 PDTs, test button, status LED, freewheeling diode, mechanical switch position indicator, polarity: A1+, A2-, input voltage: 220 V DC



Key Commercial Data

| | |
|------------------------|---|
| Packing unit | 1 pc |
| Minimum order quantity | 10 pc |
| GTIN |  4 046356 758185 |
| GTIN | 4046356758185 |
| Custom tariff number | 85364900 |
| Country of origin | Poland |

Technical data

Dimensions

| | |
|--------|---------|
| Width | 21.2 mm |
| Height | 27.5 mm |
| Depth | 35.6 mm |

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -40 °C ... 70 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |

Coil side

| | |
|---|-------------|
| Nominal input voltage U_N | 220 V DC |
| Input voltage range in reference to U_N | see diagram |
| Typical input current at U_N | 4 mA |

Single relay - REL-IR2/LDP-220DC/2X21 - 2903665

Technical data

Coil side

| | |
|---|---------------|
| Typical response time | 13 ms |
| Typical release time | 14 ms |
| Protective circuit | Damping diode |
| Status display | Yellow LED |
| Power dissipation for nominal condition | 0.88 W |

Contact side

| | |
|--|---------------------------|
| Contact type | 2 PDT |
| Type of switch contact | Single contact |
| Contact material | AgNi |
| Maximum switching voltage | 250 V AC/DC |
| Minimum switching voltage | 5 V (At 24 mA) |
| Min. switching current | 5 mA (at 24 V) |
| Maximum inrush current | 30 A (20 ms, N/O contact) |
| Limiting continuous current | 12 A |
| Interrupting rating (ohmic load) max. | 288 W (at 24 V DC) |
| | 124 W (at 48 V DC) |
| | 108 W (at 60 V DC) |
| | 52 W (at 110 V DC) |
| | 48 W (at 220 V DC) |
| | 3000 VA (for 250 V AC) |
| Switching capacity min. | 0.12 W |
| Switching capacity in acc. with DIN VDE 0660/IEC 60947 | 2 A (at 24 V, DC13) |
| | 0.22 A (at 120 V, DC13) |
| | 0.11 A (at 250 V, DC13) |
| | 3 A (at 120 V, AC15) |
| | 1.5 A (at 240 V, AC15) |
| Motor load according to UL 508 | 1/2 HP, 240 V AC |

General

| | |
|--|---------------------------------------|
| Test voltage relay winding/relay contact | 2.5 kV _{rms} (50 Hz, 1 min.) |
| Test voltage relay contact/relay contact | 2.5 kV _{rms} (50 Hz, 1 min.) |
| Test voltage PDT/PDT | 2.5 kV _{rms} (50 Hz, 1 min.) |
| Operating mode | 100% operating factor |
| Degree of protection | RT I |
| Mechanical service life | approx. 2x 10 ⁷ cycles |
| Mounting position | any |

Standards and Regulations

Single relay - REL-IR2/LDP-220DC/2X21 - 2903665

Technical data

Standards and Regulations


| | |
|----------------------------------|------------------|
| Connection in acc. with standard | CSA |
| Standards/regulations | IEC 60664 |
| | IEC 61810 |
| Rated insulation voltage | 250 V AC |
| Rated surge voltage | 4 kV |
| Insulation | Basic insulation |
| Degree of pollution | 3 |
| Overvoltage category | III |

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50 |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |


Drawings

Diagram

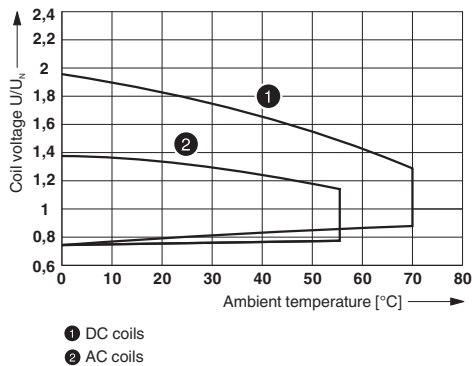

Operating voltage range


Diagram

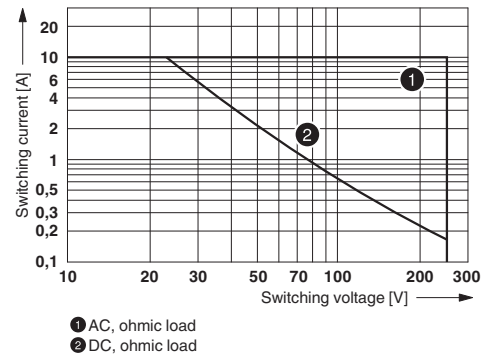


Interrupting rating

Single relay - REL-IR2/LDP-220DC/2X21 - 2903665

Diagram

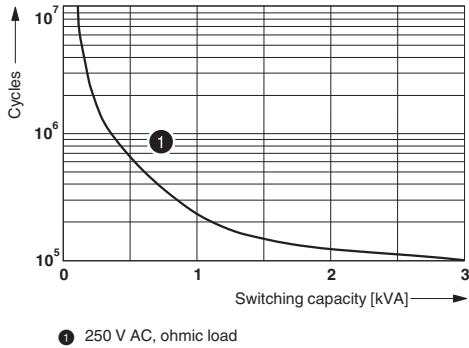

Diagram

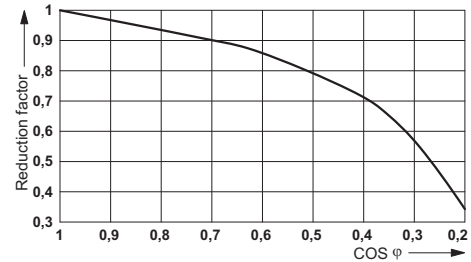

Electrical service life

Service life reduction factor

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 5.0 | 27371601 |
| eCl@ss 5.1 | 27371600 |
| eCl@ss 6.0 | 27371600 |
| eCl@ss 7.0 | 27371601 |
| eCl@ss 8.0 | 27371601 |
| eCl@ss 9.0 | 27371601 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001437 |
| ETIM 3.0 | EC001437 |
| ETIM 4.0 | EC001437 |
| ETIM 5.0 | EC001437 |
| ETIM 6.0 | EC001437 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211916 |
| UNSPSC 7.0901 | 39121515 |
| UNSPSC 11 | 39121515 |
| UNSPSC 12.01 | 39121515 |
| UNSPSC 13.2 | 39122334 |

Approvals

Approvals

Single relay - REL-IR2/LDP-220DC/2X21 - 2903665

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / VDE Zeichengenehmigung / EAC / cULus Recognized

Ex Approvals

Approval details

| | | | |
|------------------------|--|---|----------------------|
| CSA | | http://www.csagroup.org/services-industries/product-listing/ | 2554095 |
| UL Recognized | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 172140 |
| cUL Recognized | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 172140 |
| VDE Zeichengenehmigung | | http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx | 40040427 |
| EAC | | | RU C-DE.A*30.B.01082 |
| cULus Recognized | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | |

Accessories

Additional products

Single relay - REL-IR2/LDP-220DC/2X21 - 2903665

Accessories

Relay base - RIF-2-BPT/4X21 - 2900934



RIF-2... relay base, for industrial relay with 2 or 4 PDTs, push-in connection, plug-in option for input/suppressor modules, for mounting on NS 35/7,5

Relay base - RIF-2-BSC/4X21 - 2900932



RIF-2... relay base, for industrial relay with 2 or 4 changeover contacts, screw connection, plug-in option for input/interference suppression modules, for mounting on NS 35/7,5