



UE402

SAFETY RELAYS

SICK
Sensor Intelligence.



Illustration may differ



Ordering information

Type	Part no.
UE402	1023577

Other models and accessories → www.sick.com/UE402

Detailed technical data

Safety-related parameters

Safety integrity level	SIL3 (IEC 61508) SILCL3 (EN 62061)
Category	Category 4 (EN ISO 13849)
Performance level	PL e (EN ISO 13849)
PFH_D (mean probability of a dangerous failure per hour)	15 x 10 ⁻⁹ (EN ISO 13849)
T_M (mission time)	20 years (EN ISO 13849)

Functions

Bypass	✓
Operating mode switching	✓
PSDI mode	✓

Electrical data

Protection class	III (IEC 61140)
Supply voltage V_S	24 V DC (19.2 V DC ... 28.8 V DC) ¹⁾
Residual ripple	10 % ²⁾
Power consumption	≤ 110 mA
Switch-on time	≤ 4 s
IN A1 ... A6, MCC-BDC, MCC-TDC	
ON state, switching voltage HIGH	24 V DC (11 V DC ... 30 V DC)
OFF state, switching voltage LOW	-30 V DC ... 5 V DC
Input current HIGH	6 mA ... 20 mA
Input current LOW	-3 mA ... 0.5 mA
IN B1, IN B2, OUT B1, OUT B2	

¹⁾ The external voltage supply must be capable of buffering brief mains voltage failures of 20 ms as specified in EN 60204-1. Suitable power supplies are available as accessories from SICK.

²⁾ Within the limits of V_S.

Bypass change over time	≤ 2 s
Synchronous time monitoring	≤ 200 ms

¹⁾ The external voltage supply must be capable of buffering brief mains voltage failures of 20 ms as specified in EN 60204-1. Suitable power supplies are available as accessories from SICK.

²⁾ Within the limits of V_S .

Mechanical data

Dimensions (W x H x D)	22.5 mm x 99 mm x 114.5 mm
Weight	+ 120 g

Ambient data


Enclosure rating	IP20 (IEC 60529)
Ambient operating temperature	0 °C ... +55 °C
Storage temperature	-25 °C ... +70 °C

Classifications

ECI@ss 5.0	27371990
ECI@ss 5.1.4	27371990
ECI@ss 6.0	27371819
ECI@ss 6.2	27371819
ECI@ss 7.0	27371819
ECI@ss 8.0	27371819
ECI@ss 8.1	27371819
ECI@ss 9.0	27371819
ECI@ss 10.0	27371819
ECI@ss 11.0	27371819
ETIM 5.0	EC001449
ETIM 6.0	EC001449
ETIM 7.0	EC001449
UNSPSC 16.0901	41113704

Dimensional drawing (Dimensions in mm (inch))

UE402 switching amplifier

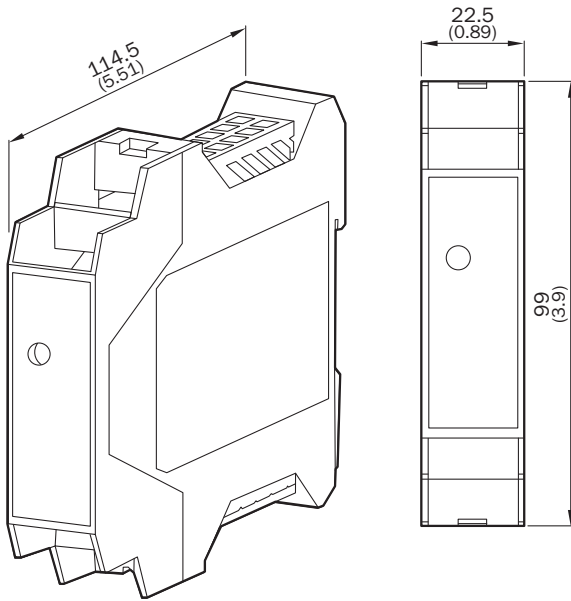

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com