SIEMENS

Data sheet

3RW5055-2TB14



SIRIUS soft starter 200-480 V 143 A, 110-250 V AC Spring-loaded terminals Thermistor input

Figure similar

product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW50
manufacturer's article number	
 of standard HMI module usable 	3RW5980-0HS01
 of high feature HMI module usable 	3RW5980-0HF00
 of communication module PROFINET standard usable 	3RW5980-0CS00
 of communication module PROFIBUS usable 	3RW5980-0CP00
 of communication module Modbus TCP usable 	3RW5980-0CT00
 of communication module Modbus RTU usable 	3RW5980-0CR00
 of communication module Ethernet/IP 	3RW5980-0CE00
 of circuit breaker usable at 400 V 	3VA2220-7MN32-0AA0; Type of assignment 1, Iq = 20 kA
 of circuit breaker usable at 500 V 	3VA2220-7MN32-0AA0; Type of assignment 1, Iq = 20 kA
 of the gG fuse usable up to 690 V 	3NA3244-6; Type of coordination 1, Iq = 65 kA
 of full range R fuse link for semiconductor protection usable up to 690 V 	3NE1 227-0; Type of coordination 2, Iq = 65 kA
 of back-up R fuse link for semiconductor protection usable up to 690 V 	3NE3 334 -0B; Type of coordination 2, Iq = 65 kA
 of line contactor usable up to 480 V 	3RT1055
 of line contactor usable up to 690 V 	3RT1055
General technical data	
starting voltage [%]	30 100 %
stopping voltage [%]	50 50 %
start-up ramp time of soft starter	0 20 s
ramp-down time of soft starter	0 20 s
current limiting value [%] adjustable	130 700 %
accuracy class acc. to IEC 61557-12	5 %
certificate of suitability	
CE marking	Yes
UL approval	Yes
CSA approval	Yes
product component is supported	
HMI-Standard	Yes
HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	2


trin alace	
trip class	CLASS 10A / 10E (preset) / 20E; acc. to IEC 60947-4-2
buffering time in the event of power failure	100
for main current circuit	100 ms
for control circuit	100 ms
insulation voltage rated value	600 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 400 V
service factor	1
reference code acc. to IEC 81346-2	Q
product function	
 ramp-up (soft starting) 	Yes
 ramp-down (soft stop) 	Yes
Soft Torque	Yes
 adjustable current limitation 	Yes
 pump ramp down 	Yes
 intrinsic device protection 	Yes
 motor overload protection 	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)
 evaluation of thermistor motor protection 	Yes; Type A PTC or Klixon / Thermoclick
auto-RESET	Yes
manual RESET	Yes
remote reset	Yes; By turning off the control supply voltage
 communication function 	Yes
 operating measured value display 	Yes; Only in conjunction with special accessories
error logbook	Yes; Only in conjunction with special accessories
 via software parameterizable 	No
 via software configurable 	Yes
PROFlenergy	Yes; in connection with the PROFINET Standard communication
	module
 voltage ramp 	Yes
torque control	No
 analog output 	No
Power Electronics	
operational current	
 at 40 °C rated value 	143 A
 at 50 °C rated value 	128 A
 at 60 °C rated value 	118 A
operating voltage	
rated value	200 480 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
operating power for 3-phase motors	
• at 230 V at 40 °C rated value	37 kW
• at 400 V at 40 °C rated value	75 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
adjustable motor current	
 at rotary coding switch on switch position 1 	68 A
 at rotary coding switch on switch position 2 	73 A
• at rotary coding switch on switch position 3	78 A
at rotary coding switch on switch position 4	83 A
 at rotary coding switch on switch position 5 	00 4
	88 A
 at rotary coding switch on switch position 6 	93 A
 at rotary coding switch on switch position 6 at rotary coding switch on switch position 7 	93 A
• at rotary coding switch on switch position 6	93 A 98 A


 at rotary coding switch on switch position 10 	113 A
 at rotary coding switch on switch position 11 	118 A
 at rotary coding switch on switch position 12 	123 A
 at rotary coding switch on switch position 13 	128 A
 at rotary coding switch on switch position 14 	133 A
 at rotary coding switch on switch position 15 	138 A
 at rotary coding switch on switch position 16 	143 A
minimum	68 A
minimum load [%]	15 %: Relative to smallest settable le
power loss [W] for rated value of the current at AC	
• at 40 °C after startup	23 W
• at 50 °C after startup	19 W
• at 60 °C after startup	16 W
power loss [W] at AC at current limitation 350 %	
• at 40 °C during startup	1 336 W
• at 50 °C during startup	1 134 W
0 1	1 007 W
at 60 °C during startup	
type of the motor protection	Electronic, tripping in the event of thermal overload of the motor
Control circuit/ Control	
type of voltage of the control supply voltage	AC
 control supply voltage at AC at 50 Hz 	110 250 V
 control supply voltage at AC at 60 Hz 	110 250 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	-15 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	10 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-15 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	10 %
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply current in standby mode rated value	30 mA
holding current in bypass operation rated value	80 mA
locked-rotor current at close of bypass contact maximum	2.5 A
inrush current peak at application of control supply voltage maximum	12.2 A
duration of inrush current peak at application of control supply voltage	2.2 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	1
number of inputs for thermistor connection	1; Type A PTC or Klixon / Thermoclick
number of digital outputs	3
not parameterizable	2
digital output version	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
number of analog outputs	
Installation/ mounting/ dimensions	with vortical mounting outford 1/00% actatable with worth at some th
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
fastening method	screw fixing
height	198 mm
width	120 mm
depth	249 mm


required spacing with side-by-side mounting	10 mm
• forwards	10 mm
backwards	0 mm
• upwards	100 mm
• downwards	75 mm
at the side	5 mm
weight without packaging	3.2 kg
Connections/ Terminals	
type of electrical connection	
 for main current circuit 	busbar connection
for control circuit	spring-loaded terminals
width of connection bar maximum	25 mm
wire length for thermistor connection	
 with conductor cross-section = 0.5 mm² maximum 	50 m
• with conductor cross-section = 1.5 mm ² maximum	150 m
• with conductor cross-section = 2.5 mm ² maximum	250 m
type of connectable conductor cross-sections	
 for main contacts for box terminal using the front clamping point solid 	16 120 mm ²
 for main contacts for box terminal using the front clamping point finely stranded with core end processing 	16 120 mm²
 for main contacts for box terminal using the front clamping point finely stranded without core end processing 	10 120 mm²
 for main contacts for box terminal using the front clamping point stranded 	16 70 mm²
 at AWG cables for main contacts for box terminal using the front clamping point 	6 250 kcmil
 for main contacts for box terminal using the back clamping point solid 	16 120 mm²
 at AWG cables for main contacts for box terminal using the back clamping point 	6 250 kcmil
 for main contacts for box terminal using both clamping points solid 	max. 1x 95 mm², 1x 120 mm²
 for main contacts for box terminal using both clamping points finely stranded with core end processing 	max. 1x 95 mm², 1x 120 mm²
 for main contacts for box terminal using both clamping points finely stranded without core end processing 	max. 1x 95 mm², 1x 120 mm²
 for main contacts for box terminal using both clamping points stranded 	max. 2x 120 mm ²
 for main contacts for box terminal using the back clamping point finely stranded with core end processing 	16 120 mm²
 for main contacts for box terminal using the back clamping point finely stranded without core end processing 	10 120 mm²
 for main contacts for box terminal using the back clamping point stranded 	16 120 mm²
type of connectable conductor cross-sections	
 at AWG cables for main current circuit solid 	4 250 kcmil
 for DIN cable lug for main contacts stranded 	16 95 mm²
 for DIN cable lug for main contacts finely stranded 	25 120 mm²
type of connectable conductor cross-sections	
 for control circuit solid 	2x (0.25 1.5 mm²)
 for control circuit finely stranded with core end processing 	2x (0.25 1.5 mm²)
 at AWG cables for control circuit solid 	2x (24 16)
 at AWG cables for control circuit finely stranded with core end processing 	2x (24 16)
wire length	

	000
between soft starter and motor maximum	800 m
at the digital inputs at AC maximum	1 000 m
tightening torque	10 14 N m
for main contacts with screw-type terminals	10 14 N·m 0.8 1.2 N·m
 for auxiliary and control contacts with screw-type terminals 	0.8 1.2 N·m
tightening torque [lbf·in]	
 for main contacts with screw-type terminals 	89 124 lbf·in
 for auxiliary and control contacts with screw-type 	7 10.3 lbf·in
terminals	
Ambient conditions	
installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see manual
 ambient temperature during operation 	-25 +60 °C; Please observe derating at temperatures of 40 °C or
	above
 ambient temperature during storage and transport 	-40 +80 °C
environmental category	
 during operation acc. to IEC 60721 	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
during storage acc. to IEC 60721	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
 during transport acc. to IEC 60721 	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
EMC emitted interference	acc. to IEC 60947-4-2: Class A
Communication/ Protocol	
communication module is supported	
 PROFINET standard 	Yes
EtherNet/IP	Yes
Modbus RTU	Yes
Modbus TCP	Yes
PROFIBUS	Yes
UL/CSA ratings	
manufacturer's article number	
manufacturer's article number • of circuit breaker	
	Siemens type: 3VA5225, max. 250 A; Iq = 10 kA
 of circuit breaker — usable for Standard Faults at 460/480 V 	Siemens type: 3VA5225, max. 250 A; Iq = 10 kA
 of circuit breaker usable for Standard Faults at 460/480 V according to UL 	Siemens type: 3VA5225, max. 250 A; lq = 10 kA Type: Class RK5 / K5, max. 350 A; lq = 10 kA
 of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V 	
 of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V 	Type: Class RK5 / K5, max. 350 A; lq = 10 kA
 of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL 	Type: Class RK5 / K5, max. 350 A; lq = 10 kA
 of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse 	Type: Class RK5 / K5, max. 350 A; lq = 10 kA Type: Class J, max. 350 A; lq = 100 kA
 of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value 	Type: Class RK5 / K5, max. 350 A; lq = 10 kA Type: Class J, max. 350 A; lq = 100 kA 40 hp
 of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value 	Type: Class RK5 / K5, max. 350 A; lq = 10 kA Type: Class J, max. 350 A; lq = 100 kA 40 hp 40 hp
 of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value Safety related data protection class IP on the front acc. to IEC 60529 	Type: Class RK5 / K5, max. 350 A; lq = 10 kA Type: Class J, max. 350 A; lq = 100 kA 40 hp 40 hp 100 hp
 of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value Safety related data protection class IP on the front acc. to IEC 60529 touch protection on the front acc. to IEC 60529 	Type: Class RK5 / K5, max. 350 A; lq = 10 kA Type: Class J, max. 350 A; lq = 100 kA 40 hp 40 hp 100 hp
 of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value Safety related data protection class IP on the front acc. to IEC 60529 	Type: Class RK5 / K5, max. 350 A; lq = 10 kA Type: Class J, max. 350 A; lq = 100 kA 40 hp 40 hp 100 hp
 of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value Safety related data protection class IP on the front acc. to IEC 60529 touch protection on the front acc. to IEC 60529 	Type: Class RK5 / K5, max. 350 A; lq = 10 kA Type: Class J, max. 350 A; lq = 100 kA 40 hp 40 hp 100 hp
 of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse 	Type: Class RK5 / K5, max. 350 A; lq = 10 kA Type: Class J, max. 350 A; lq = 100 kA 40 hp 40 hp 100 hp
 of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse 	Type: Class RK5 / K5, max. 350 A; lq = 10 kA Type: Class J, max. 350 A; lq = 100 kA 40 hp 40 hp 100 hp 100 hp IP00; IP20 with cover finger-safe, for vertical contact from the front with cover
 of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse 	Type: Class RK5 / K5, max. 350 A; lq = 10 kA Type: Class J, max. 350 A; lq = 100 kA 40 hp 40 hp 100 hp 100 hp IIP00; IP20 with cover finger-safe, for vertical contact from the front with cover Yes
 of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse 	Type: Class RK5 / K5, max. 350 A; lq = 10 kA Type: Class J, max. 350 A; lq = 100 kA 40 hp 40 hp 100 hp 100 p IP00; IP20 with cover finger-safe, for vertical contact from the front with cover Yes Yes
 of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse 	Type: Class RK5 / K5, max. 350 A; lq = 10 kA Type: Class J, max. 350 A; lq = 100 kA 40 hp 40 hp 100 hp IP00; IP20 with cover finger-safe, for vertical contact from the front with cover Yes Yes 0
 of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse 	Type: Class RK5 / K5, max. 350 A; lq = 10 kA Type: Class J, max. 350 A; lq = 100 kA 40 hp 40 hp 100 hp IP00; IP20 with cover finger-safe, for vertical contact from the front with cover Yes Yes 0 0.09
 of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse 	Type: Class RK5 / K5, max. 350 A; lq = 10 kA Type: Class J, max. 350 A; lq = 100 kA 40 hp 40 hp 100 hp 100 hp 1P00; IP20 with cover finger-safe, for vertical contact from the front with cover Yes Yes 0 0.09 0.000009 1/h

eneral Product	t Approval			For use in hazardo	us locations
			EHC	IECEx	Ex ATEX
Declaration of C	onformity	Test Certificates		other	
CE EG-Konf	<u>Miscellaneous</u>	<u>Type Test</u> <u>Certificates/Test</u> <u>Report</u>	<u>Type Test</u> <u>Certificates/Test</u> <u>Report</u>	Confirmation	Confirmation
	5				
ther informatio formation- and tps://www.sieme dustry Mall (Or	Downloadcenter (Catalo		3RW5055-2TB14		_
rther informatio formation- and ttps://www.sieme idustry Mall (Or ttps://mall.indust ax online gener	Downloadcenter (Catalo ens.com/ic10 nline ordering system) ry.siemens.com/mall/en/er	n/Catalog/product?mlfb=		<u>)55-2TB14</u>	
rther information formation- and ttps://www.siemen dustry Mall (Or ttps://mall.indust ax online gener ttp://support.auto ervice&Suppor	Downloadcenter (Catalo ens.com/ic10 nline ordering system) ry.siemens.com/mall/en/er rator	n/Catalog/product?mlfb= //CAXorder/default.aspx/ Characteristics, FAQs,	lang=en&mlfb=3RW50	<u>055-2TB14</u>	
rther information- and ttps://www.sieme idustry Mall (Or ttps://mall.indust ax online gener ttp://support.auto ervice&Suppor ttps://support.ind nage database	Downloadcenter (Catalo ens.com/ic10 nline ordering system) ry.siemens.com/mall/en/en rator omation.siemens.com/WW t (Manuals, Certificates, 6	n/Catalog/product?mlfb= //CAXorder/default.aspx/ Characteristics, FAQs, /en/ps/3RW5055-2TB14 ension drawings, 3D n	Plang=en&mlfb=3RW50) nodels, device circuit		cros,)
rther information- and ttps://www.siemen idustry Mall (Or ttps://mall.indust ax online gener ttp://support.auto ervice&Support ttps://support.ind nage database ttp://www.automatharacteristic: T	Downloadcenter (Catalo ens.com/ic10 nline ordering system) ry.siemens.com/mall/en/er rator omation.siemens.com/WW t (Manuals, Certificates, o lustry.siemens.com/cs/ww/ (product images, 2D dim	n/Catalog/product?mlfb= //CAXorder/default.aspx/ Characteristics, FAQs, /en/ps/3RW5055-2TB14 rension drawings, 3D n cax_de.aspx?mlfb=3RW I ² t, Let-through current	Plang=en&mlfb=3RW50) nodels, device circuit 5055-2TB14⟨=en		cros,)
rther information- and https://www.siemen hdustry Mall (Or https://mall.indust ax online gener http://support.auto ervice&Support https://support.auto hage database http://www.automation haracteristic: T https://support.ind haracteristic: In	Downloadcenter (Catalo ens.com/ic10 nline ordering system) ry.siemens.com/mall/en/er rator omation.siemens.com/WW t (Manuals, Certificates, (lustry.siemens.com/cs/ww (product images, 2D dim ation.siemens.com/bilddb/ ripping characteristics, I	n/Catalog/product?mlfb= //CAXorder/default.aspx/ Characteristics, FAQs, /en/ps/3RW5055-2TB14 rension drawings, 3D n cax_de.aspx?mlfb=3RW Pt, Let-through current /en/ps/3RW5055-2TB14	Plang=en&mlfb=3RW50) nodels, device circuit 5055-2TB14⟨=en /char	diagrams, EPLAN ma	

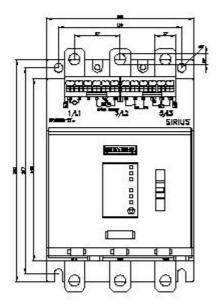

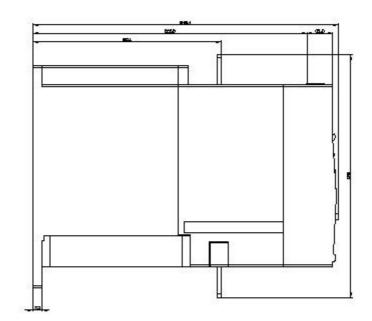

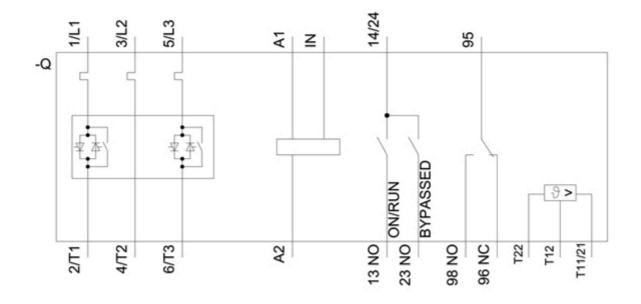

last modified:

12/15/2020 🖸