SIEMENS

Data sheet 3RW5055-6TB04



SIRIUS soft starter 200-480 V 143 A, 24 V AC/DC Screw terminals Thermistor input

Figure similar

product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW50
manufacturer's article number	
 of standard HMI module usable 	3RW5980-0HS01
 of high feature HMI module usable 	3RW5980-0HF00
 of communication module PROFINET standard usable 	3RW5980-0CS00
 of communication module PROFIBUS usable 	3RW5980-0CP00
 of communication module Modbus TCP usable 	3RW5980-0CT00
 of communication module Modbus RTU usable 	3RW5980-0CR00
 of communication module Ethernet/IP 	3RW5980-0CE00
 of circuit breaker usable at 400 V 	3VA2220-7MN32-0AA0; Type of assignment 1, Iq = 20 kA
 of circuit breaker usable at 500 V 	3VA2220-7MN32-0AA0; Type of assignment 1, Iq = 20 kA
 of the gG fuse usable up to 690 V 	3NA3244-6; Type of coordination 1, Iq = 65 kA
 of full range R fuse link for semiconductor protection usable up to 690 V 	3NE1 227-0; Type of coordination 2, lq = 65 kA
 of back-up R fuse link for semiconductor protection usable up to 690 V 	3NE3 334 -0B; Type of coordination 2, Iq = 65 kA
 of line contactor usable up to 480 V 	3RT1055
 of line contactor usable up to 690 V 	3RT1055
General technical data	
starting voltage [%]	30 100 %
stopping voltage [%]	50 50 %
start-up ramp time of soft starter	0 20 s
ramp-down time of soft starter	0 20 s
current limiting value [%] adjustable	130 700 %
accuracy class acc. to IEC 61557-12	5 %
certificate of suitability	
CE marking	Yes
 UL approval 	Yes
CSA approval	Yes
product component is supported	
HMI-Standard	Yes
HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	2

trin close	CLASS 10A / 10E (preset) / 20E; and to JEC 60047 4.2
trip class	CLASS 10A / 10E (preset) / 20E; acc. to IEC 60947-4-2
buffering time in the event of power failure	100 mg
for main current circuit for control circuit	100 ms 100 ms
insulation voltage rated value	600 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV 1 400 V
blocking voltage of the thyristor maximum service factor	
reference code acc. to IEC 81346-2	1
product function	Q
•	Yes
ramp-up (soft starting)ramp-down (soft stop)	Yes
• Soft Torque	Yes
•	Yes
adjustable current limitation nump ramp days	Yes
pump ramp down intringic dovice protection	Yes
intrinsic device protection meter everland protection	
motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)
evaluation of thermistor motor protection	Yes; Type A PTC or Klixon / Thermoclick
auto-RESET	Yes
manual RESET	Yes
remote reset remove	Yes; By turning off the control supply voltage
communication function	Yes
operating measured value display	Yes; Only in conjunction with special accessories
error logbook	Yes; Only in conjunction with special accessories
via software parameterizable	No
via software configurable	Yes
PROFlenergy	Yes; in connection with the PROFINET Standard communication module
voltage ramp	Yes
torque control	No No
analog output	No
Power Electronics	
operational current	440.4
at 40 °C rated value at 50 °C rated value	143 A
• at 50 °C rated value	128 A
at 60 °C rated value	118 A
operating voltage	200 480 V
• rated value	200 480 V
relative negative tolerance of the operating voltage	-15 % 10 %
relative positive tolerance of the operating voltage	10 %
operating power for 3-phase motors • at 230 V at 40 °C rated value	37 kW
at 400 V at 40 °C rated value at 400 V at 40 °C rated value	75 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 1 rated value Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
adjustable motor current	
at rotary coding switch on switch position 1	68 A
at rotary coding switch on switch position 2	73 A
 at rotary coding switch on switch position 3 	78 A
 at rotary coding switch on switch position 4 	83 A
 at rotary coding switch on switch position 5 	88 A
 at rotary coding switch on switch position 6 	93 A
 at rotary coding switch on switch position 7 	98 A
 at rotary coding switch on switch position 7 at rotary coding switch on switch position 8 	103 A
 at rotary coding switch on switch position 8 at rotary coding switch on switch position 9 	103 A 108 A
at rotary county switch on switch position 9	IVUA

 at rotary coding switch on switch position 10 	113 A
at rotary coding switch on switch position 10 at rotary coding switch on switch position 11	118 A
at rotary coding switch on switch position 11 at rotary coding switch on switch position 12	123 A
at rotary coding switch on switch position 12 at rotary coding switch on switch position 13	128 A
at rotary coding switch on switch position 14	133 A
at rotary coding switch on switch position 15	138 A
at rotary coding switch on switch position 16 at rotary coding switch on switch position 16	143 A
minimum	68 A
minimum load [%]	15 %; Relative to smallest settable le
power loss [W] for rated value of the current at AC	10 %, Itelative to diffulled tottable to
at 40 °C after startup	23 W
at 50 °C after startup	19 W
at 60 °C after startup	16 W
power loss [W] at AC at current limitation 350 %	
at 40 °C during startup	1 336 W
at 50 °C during startup	1 134 W
 at 60 °C during startup 	1 007 W
type of the motor protection	Electronic, tripping in the event of thermal overload of the motor
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC at 50 Hz rated value	24 V
control supply voltage at AC at 60 Hz rated value	24 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	20 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	20 %
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
 control supply voltage at DC rated value 	24 V
relative negative tolerance of the control supply voltage at DC	-20 %
relative positive tolerance of the control supply voltage at DC	20 %
control supply current in standby mode rated value	160 mA
holding current in bypass operation rated value	360 mA
locked-rotor current at close of bypass contact maximum	7.6 A
inrush current peak at application of control supply voltage maximum	3.3 A
duration of inrush current peak at application of control supply voltage	12.1 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	1
number of inputs for thermistor connection	1; Type A PTC or Klixon / Thermoclick
number of digital outputs	3
not parameterizable	2
digital output version	2 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	0
Installation/ mounting/ dimensions	

	surface +/- 22.5° tiltable to the front and back
fastening method	screw fixing
height	198 mm
width	120 mm
depth	249 mm
required spacing with side-by-side mounting	
• forwards	10 mm
backwards	0 mm
• upwards	100 mm
• downwards	75 mm
at the side	5 mm
weight without packaging	3.2 kg
Connections/ Terminals	
type of electrical connection	
for main current circuit	busbar connection
for control circuit	screw-type terminals
width of connection bar maximum	25 mm
wire length for thermistor connection	
with conductor cross-section = 0.5 mm² maximum	50 m
with conductor cross-section = 1.5 mm² maximum	150 m
with conductor cross-section = 2.5 mm² maximum	250 m
type of connectable conductor cross-sections	200 111
for main contacts for box terminal using the front clamping point solid	16 120 mm²
 for main contacts for box terminal using the front clamping point finely stranded with core end processing 	16 120 mm²
 for main contacts for box terminal using the front clamping point finely stranded without core end processing 	10 120 mm²
for main contacts for box terminal using the front clamping point stranded	16 70 mm²
 at AWG cables for main contacts for box terminal using the front clamping point 	6 250 kcmil
 for main contacts for box terminal using the back clamping point solid 	16 120 mm²
 at AWG cables for main contacts for box terminal using the back clamping point 	6 250 kcmil
 for main contacts for box terminal using both clamping points solid 	max. 1x 95 mm², 1x 120 mm²
 for main contacts for box terminal using both clamping points finely stranded with core end processing 	max. 1x 95 mm², 1x 120 mm²
 for main contacts for box terminal using both clamping points finely stranded without core end processing 	max. 1x 95 mm², 1x 120 mm²
 for main contacts for box terminal using both clamping points stranded 	max. 2x 120 mm²
 for main contacts for box terminal using the back clamping point finely stranded with core end processing 	16 120 mm²
 for main contacts for box terminal using the back clamping point finely stranded without core end processing 	10 120 mm²
for main contacts for box terminal using the back clamping point stranded	16 120 mm²
type of connectable conductor cross-sections	
 at AWG cables for main current circuit solid 	4 250 kcmil
• for DIN cable lug for main contacts stranded	16 95 mm²
for DIN cable lug for main contacts finely stranded	25 120 mm²
type of connectable conductor cross-sections	
for control circuit solid	1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²)
for control circuit finely stranded with core end	1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²)

in	
processing	4 (00 40) 0 (00 44)
at AWG cables for control circuit solid	1x (20 12), 2x (20 14)
wire length	
 between soft starter and motor maximum 	800 m
at the digital inputs at AC maximum	1 000 m
tightening torque	
 for main contacts with screw-type terminals 	10 14 N·m
 for auxiliary and control contacts with screw-type 	0.8 1.2 N·m
terminals	
tightening torque [lbf·in]	
 for main contacts with screw-type terminals 	89 124 lbf·in
 for auxiliary and control contacts with screw-type 	7 10.3 lbf·in
terminals	
Ambient conditions	
installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see manual
ambient temperature during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or
	above
ambient temperature during storage and transport	-40 +80 °C
environmental category	
 during operation acc. to IEC 60721 	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
 during storage acc. to IEC 60721 	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must
J J	not get inside the devices), 1M4
 during transport acc. to IEC 60721 	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
EMC emitted interference	acc. to IEC 60947-4-2: Class A
Communication/ Protocol	
communication module is supported	
PROFINET standard	Yes
• EtherNet/IP	Yes
	Yes
Modbus RTU Madhus TOP	
Modbus TCP	Yes
PROFIBUS	Yes
111 (22.1)	
UL/CSA ratings	
UL/CSA ratings manufacturer's article number	
-	
manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V	Siemens type: 3VA5225, max. 250 A; lq = 10 kA
manufacturer's article number	Siemens type: 3VA5225, max. 250 A; Iq = 10 kA
manufacturer's article number	
manufacturer's article number	Siemens type: 3VA5225, max. 250 A; lq = 10 kA Type: Class RK5 / K5, max. 350 A; lq = 10 kA
manufacturer's article number	Type: Class RK5 / K5, max. 350 A; Iq = 10 kA
manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V according to UL • of the fuse — usable for Standard Faults up to 575/600 V	
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V	Type: Class RK5 / K5, max. 350 A; Iq = 10 kA
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL	Type: Class RK5 / K5, max. 350 A; Iq = 10 kA
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors	Type: Class RK5 / K5, max. 350 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value	Type: Class RK5 / K5, max. 350 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value	Type: Class RK5 / K5, max. 350 A; lq = 10 kA Type: Class J, max. 350 A; lq = 100 kA 40 hp 40 hp
manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V according to UL • of the fuse — usable for Standard Faults up to 575/600 V according to UL — usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors • at 200/208 V at 50 °C rated value • at 460/480 V at 50 °C rated value • at 460/480 V at 50 °C rated value Safety related data	Type: Class RK5 / K5, max. 350 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA 40 hp 40 hp 100 hp
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value safety related data protection class IP on the front acc. to IEC 60529	Type: Class RK5 / K5, max. 350 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA 40 hp 40 hp 100 hp
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value safety related data protection class IP on the front acc. to IEC 60529 touch protection on the front acc. to IEC 60529	Type: Class RK5 / K5, max. 350 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA 40 hp 40 hp 100 hp
manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V according to UL • of the fuse — usable for Standard Faults up to 575/600 V according to UL — usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors • at 200/208 V at 50 °C rated value • at 220/230 V at 50 °C rated value • at 460/480 V at 50 °C rated value Safety related data protection class IP on the front acc. to IEC 60529 touch protection on the front acc. to IEC 60529	Type: Class RK5 / K5, max. 350 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA 40 hp 40 hp 100 hp
manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V according to UL • of the fuse — usable for Standard Faults up to 575/600 V according to UL — usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors • at 200/208 V at 50 °C rated value • at 220/230 V at 50 °C rated value • at 460/480 V at 50 °C rated value Safety related data protection class IP on the front acc. to IEC 60529 touch protection on the front acc. to IEC 60529 ATEX certificate of suitability	Type: Class RK5 / K5, max. 350 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA 40 hp 40 hp 100 hp IP00; IP20 with cover finger-safe, for vertical contact from the front with cover
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value ATEX certificate of suitability ATEX	Type: Class RK5 / K5, max. 350 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA 40 hp 40 hp 100 hp IP00; IP20 with cover finger-safe, for vertical contact from the front with cover
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value At 60/480 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value Safety related data protection class IP on the front acc. to IEC 60529 touch protection on the front acc. to IEC 60529 ATEX certificate of suitability ATEX IECEX	Type: Class RK5 / K5, max. 350 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA 40 hp 40 hp 100 hp IP00; IP20 with cover finger-safe, for vertical contact from the front with cover Yes Yes
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value ATEX certificate of suitability ATEX	Type: Class RK5 / K5, max. 350 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA 40 hp 40 hp 100 hp IP00; IP20 with cover finger-safe, for vertical contact from the front with cover
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value At 60/480 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value Safety related data protection class IP on the front acc. to IEC 60529 touch protection on the front acc. to IEC 60529 ATEX certificate of suitability ATEX hardware fault tolerance acc. to IEC 61508 relating to	Type: Class RK5 / K5, max. 350 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA 40 hp 40 hp 100 hp IP00; IP20 with cover finger-safe, for vertical contact from the front with cover Yes Yes
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value At 60/480 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value Safety related data protection class IP on the front acc. to IEC 60529 touch protection on the front acc. to IEC 60529 ATEX certificate of suitability ATEX hardware fault tolerance acc. to IEC 61508 relating to ATEX PFDavg with low demand rate acc. to IEC 61508	Type: Class RK5 / K5, max. 350 A; lq = 10 kA Type: Class J, max. 350 A; lq = 100 kA 40 hp 40 hp 100 hp IP00; IP20 with cover finger-safe, for vertical contact from the front with cover Yes Yes 0
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value Safety related data protection class IP on the front acc. to IEC 60529 touch protection on the front acc. to IEC 60529 ATEX certificate of suitability ATEX hardware fault tolerance acc. to IEC 61508 relating to ATEX PFDavg with low demand rate acc. to IEC 61508 relating to ATEX PFDavg with high demand rate acc. to EN 62061 relating	Type: Class RK5 / K5, max. 350 A; lq = 10 kA Type: Class J, max. 350 A; lq = 100 kA 40 hp 40 hp 100 hp IP00; IP20 with cover finger-safe, for vertical contact from the front with cover Yes Yes 0 0.09

to ATEX

T1 value for proof test interval or service life acc. to IEC 61508 relating to ATEX

3 y

Certificates/ approvals

General Product Approval

For use in hazardous locations













Declaration of Conformity

Test Certificates

other

Miscellaneous



Type Test Certificates/Test Report Type Test Certificates/Test Report Confirmation

Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5055-6TB04

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5055-6TB04

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5055-6TB04

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5055-6TB04&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5055-6TB04/char


Characteristic: Installation altitude


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5055-6TB04&objecttype=14&gridview=view1

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

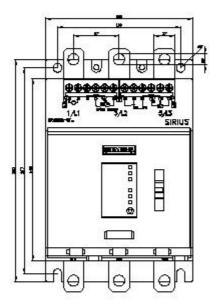

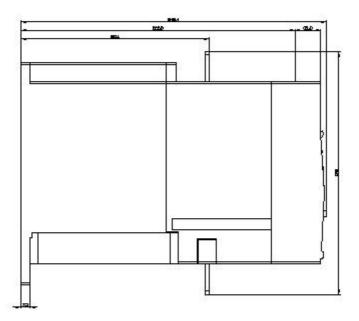

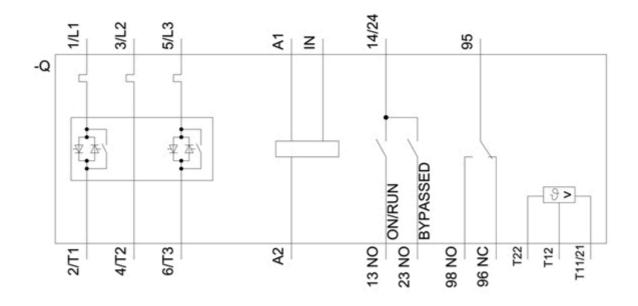

last modified: 12/15/2020 🖸