SIEMENS

Data sheet 3RW5056-2AB04

SIRIUS



SIRIUS soft starter 200-480 V 171 A, 24 V AC/DC Spring-loaded terminals Analog output

Figure similar

product brand name

product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW50
manufacturer's article number	
 of standard HMI module usable 	3RW5980-0HS01
 of high feature HMI module usable 	3RW5980-0HF00
 of communication module PROFINET standard usable 	3RW5980-0CS00
 of communication module PROFIBUS usable 	3RW5980-0CP00
 of communication module Modbus TCP usable 	3RW5980-0CT00
 of communication module Modbus RTU usable 	3RW5980-0CR00
 of communication module Ethernet/IP 	3RW5980-0CE00
 of circuit breaker usable at 400 V 	3VA2220-7MN32-0AA0; Type of assignment 1, Iq = 20 kA
 of circuit breaker usable at 500 V 	3VA2220-7MN32-0AA0; Type of assignment 1, Iq = 20 kA
 of the gG fuse usable up to 690 V 	3NA3244-6; Type of coordination 1, Iq = 65 kA
 of full range R fuse link for semiconductor protection usable up to 690 V 	3NE1 230-0; Type of coordination 2, Iq = 65 kA
 of back-up R fuse link for semiconductor protection usable up to 690 V 	3NE3 335; Type of coordination 2, Iq = 65 kA
 of line contactor usable up to 480 V 	3RT1056
 of line contactor usable up to 690 V 	3RT1064
General technical data	
starting voltage [%]	30 100 %
stopping voltage [%]	50 50 %
start-up ramp time of soft starter	0 20 s
ramp-down time of soft starter	0 20 s
current limiting value [%] adjustable	130 700 %
accuracy class acc. to IEC 61557-12	5 %
certificate of suitability	
 CE marking 	Yes
 UL approval 	Yes
CSA approval	Yes
product component is supported	
HMI-Standard	Yes
HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	2

tvin alege	CLASS 10A / 10E (propert) / 20E; one to IEC 60047.4.2
trip class	CLASS 10A / 10E (preset) / 20E; acc. to IEC 60947-4-2
buffering time in the event of power failure	400
for main current circuit	100 ms
• for control circuit	100 ms
insulation voltage rated value	600 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 400 V
service factor	1
reference code acc. to IEC 81346-2	Q
product function	
ramp-up (soft starting)	Yes
ramp-down (soft stop)	Yes
Soft Torque	Yes
 adjustable current limitation 	Yes
pump ramp down	Yes
 intrinsic device protection 	Yes
 motor overload protection 	Yes; Electronic motor overload protection
 evaluation of thermistor motor protection 	No
• auto-RESET	Yes
• manual RESET	Yes
• remote reset	Yes; By turning off the control supply voltage
 communication function 	Yes
 operating measured value display 	Yes; Only in conjunction with special accessories
error logbook	Yes; Only in conjunction with special accessories
 via software parameterizable 	No
 via software configurable 	Yes
 PROFlenergy 	Yes; in connection with the PROFINET Standard communication
	module
voltage ramp	Yes
torque control	No
analog output	Yes; 4 20 mA (default) / 0 10 V (parameterizable with High Feature HMI)
Power Electronics	
operational current	
at 40 °C rated value at 40 °C rated value	171 A
• at 50 °C rated value	153 A
• at 60 °C rated value	141 A
operating voltage	
rated value	200 480 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
operating power for 3-phase motors	
• at 230 V at 40 °C rated value	45 kW
at 400 V at 40 °C rated value	90 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
adjustable motor current	
at rotary coding switch on switch position 1	81 A
at rotary coding switch on switch position 2	87 A
at rotary coding switch on switch position 3	93 A
at rotary coding switch on switch position 4	99 A
at rotary coding switch on switch position 5	105 A
at rotary coding switch on switch position 6	111 A
at rotary coding switch on switch position 7 at rotary coding switch on switch position 7	117 A
at rotary coding switch on switch position 8	123 A
 at rotary coding switch on switch position 9 	129 A

 at rotary coding switch on switch position 10 	135 A
at rotary coding switch on switch position 11	141 A
at rotary coding switch on switch position 12	147 A
at rotary coding switch on switch position 13	153 A
at rotary coding switch on switch position 14	159 A
at rotary coding switch on switch position 15	165 A
at rotary coding switch on switch position 16	171 A
• minimum	81 A
minimum load [%]	15 %: Relative to smallest settable le
power loss [W] for rated value of the current at AC	·
at 40 °C after startup	29 W
at 50 °C after startup	23 W
at 60 °C after startup	20 W
power loss [W] at AC at current limitation 350 %	
 at 40 °C during startup 	1 751 W
 at 50 °C during startup 	1 478 W
 at 60 °C during startup 	1 308 W
type of the motor protection	Electronic, tripping in the event of thermal overload of the motor
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC at 50 Hz rated value	24 V
• control supply voltage at AC at 60 Hz rated value	24 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	20 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	20 %
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
 control supply voltage at DC rated value 	24 V
relative negative tolerance of the control supply voltage at DC	-20 %
relative positive tolerance of the control supply voltage at DC	20 %
control supply current in standby mode rated value	160 mA
holding current in bypass operation rated value	360 mA
locked-rotor current at close of bypass contact maximum	7.6 A
inrush current peak at application of control supply voltage maximum	3.3 A
duration of inrush current peak at application of control supply voltage	12.1 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	1
namber of digital inputs	0
number of inputs for thermistor connection	0
	3
number of inputs for thermistor connection	
number of inputs for thermistor connection number of digital outputs	3
number of inputs for thermistor connection number of digital outputs • not parameterizable	3 2
number of inputs for thermistor connection number of digital outputs • not parameterizable digital output version	3 2 2 normally-open contacts (NO) / 1 changeover contact (CO)

	surface +/- 22.5° tiltable to the front and back
fastening method	screw fixing
height	198 mm
width	120 mm
depth	249 mm
required spacing with side-by-side mounting	
• forwards	10 mm
backwards	0 mm
• upwards	100 mm
downwards	75 mm
at the side	5 mm
weight without packaging	5.2 kg
Connections/ Terminals	O.E. Ng
type of electrical connection	
• for main current circuit	busbar connection
• for control circuit	spring-loaded terminals
width of connection bar maximum	25 mm
type of connectable conductor cross-sections	25 111111
	16 120 mm²
 for main contacts for box terminal using the front clamping point solid 	10 120 111111
 for main contacts for box terminal using the front clamping point finely stranded with core end processing 	16 120 mm²
for main contacts for box terminal using the front clamping point finely stranded without core end processing	10 120 mm²
for main contacts for box terminal using the front clamping point stranded	16 70 mm²
 at AWG cables for main contacts for box terminal using the front clamping point 	6 250 kcmil
 for main contacts for box terminal using the back clamping point solid 	16 120 mm²
 at AWG cables for main contacts for box terminal using the back clamping point 	6 250 kcmil
 for main contacts for box terminal using both clamping points solid 	max. 1x 95 mm², 1x 120 mm²
 for main contacts for box terminal using both clamping points finely stranded with core end processing 	max. 1x 95 mm², 1x 120 mm²
 for main contacts for box terminal using both clamping points finely stranded without core end processing 	max. 1x 95 mm², 1x 120 mm²
 for main contacts for box terminal using both clamping points stranded 	max. 2x 120 mm ²
 for main contacts for box terminal using the back clamping point finely stranded with core end processing 	16 120 mm²
 for main contacts for box terminal using the back clamping point finely stranded without core end processing 	10 120 mm²
for main contacts for box terminal using the back clamping point stranded	16 120 mm²
type of connectable conductor cross-sections	
 at AWG cables for main current circuit solid 	4 250 kcmil
 for DIN cable lug for main contacts stranded 	16 95 mm²
for DIN cable lug for main contacts finely stranded	25 120 mm²
type of connectable conductor cross-sections	
for control circuit solid	2x (0.25 1.5 mm²)
 for control circuit finely stranded with core end processing 	2x (0.25 1.5 mm²)
at AWG cables for control circuit solid	2x (24 16)
 at AWG cables for control circuit finely stranded with core end processing 	2x (24 16)

wire length	
 between soft starter and motor maximum 	800 m
at the digital inputs at AC maximum	1 000 m
tightening torque	
 for main contacts with screw-type terminals 	10 14 N·m
for auxiliary and control contacts with screw-type terminals	0.8 1.2 N·m
tightening torque [lbf·in]	
 for main contacts with screw-type terminals 	89 124 lbf·in
 for auxiliary and control contacts with screw-type terminals 	7 10.3 lbf·in
Ambient conditions	
installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see manual
ambient temperature during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or above
ambient temperature during storage and transport	-40 +80 °C
environmental category	
during operation acc. to IEC 60721	3K6 (no ice formation, only occasional condensation), 3C3 (no salt
	mist), 3S2 (sand must not get into the devices), 3M6
 during storage acc. to IEC 60721 	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
during transport acc. to IEC 60721	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
EMC emitted interference	acc. to IEC 60947-4-2: Class A
Communication/ Protocol	
communication module is supported	
 PROFINET standard 	Yes
EtherNet/IP	Yes
Modbus RTU	Yes
Modbus TCP	Yes
PROFIBUS	Yes
UL/CSA ratings	
UL/CSA ratings manufacturer's article number	
manufacturer's article number	Siemens type: 3VA5225, max. 250 A; Iq = 10 kA
manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V	Siemens type: 3VA5225, max. 250 A; Iq = 10 kA Siemens type: 3VA52, max. 250 A; Iq max = 65 kA
manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V according to UL — usable for High Faults at 460/480 V according	
manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V according to UL — usable for High Faults at 460/480 V according to UL	
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL usable for High Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V	Siemens type: 3VA52, max. 250 A; lq max = 65 kA
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL usable for High Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V	Siemens type: 3VA52, max. 250 A; lq max = 65 kA Type: Class RK5 / K5, max. 400 A; lq = 10 kA
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL usable for High Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL according to UL	Siemens type: 3VA52, max. 250 A; lq max = 65 kA Type: Class RK5 / K5, max. 400 A; lq = 10 kA
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL usable for High Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors	Siemens type: 3VA52, max. 250 A; Iq max = 65 kA Type: Class RK5 / K5, max. 400 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL usable for High Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value	Siemens type: 3VA52, max. 250 A; lq max = 65 kA Type: Class RK5 / K5, max. 400 A; lq = 10 kA Type: Class J, max. 350 A; lq = 100 kA
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL usable for High Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value	Siemens type: 3VA52, max. 250 A; Iq max = 65 kA Type: Class RK5 / K5, max. 400 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL usable for High Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value Safety related data	Siemens type: 3VA52, max. 250 A; Iq max = 65 kA Type: Class RK5 / K5, max. 400 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL usable for High Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 460/480 V at 50 °C rated value	Siemens type: 3VA52, max. 250 A; Iq max = 65 kA Type: Class RK5 / K5, max. 400 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA 50 hp 50 hp 100 hp
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL usable for High Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value Safety related data protection class IP on the front acc. to IEC 60529	Siemens type: 3VA52, max. 250 A; Iq max = 65 kA Type: Class RK5 / K5, max. 400 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA 50 hp 50 hp 100 hp
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL usable for High Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value Safety related data protection class IP on the front acc. to IEC 60529 touch protection on the front acc. to IEC 60529	Siemens type: 3VA52, max. 250 A; Iq max = 65 kA Type: Class RK5 / K5, max. 400 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA 50 hp 50 hp 100 hp
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL usable for High Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value At 60/480 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value Safety related data protection class IP on the front acc. to IEC 60529 touch protection on the front acc. to IEC 60529 ATEX certificate of suitability	Siemens type: 3VA52, max. 250 A; Iq max = 65 kA Type: Class RK5 / K5, max. 400 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA 50 hp 50 hp 100 hp IP00; IP20 with cover finger-safe, for vertical contact from the front with cover
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL usable for High Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value At 60/480 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value At 60529 ATEX certificate of suitability ATEX	Siemens type: 3VA52, max. 250 A; Iq max = 65 kA Type: Class RK5 / K5, max. 400 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA 50 hp 50 hp 100 hp IP00; IP20 with cover finger-safe, for vertical contact from the front with cover
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL usable for High Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value At 60/480 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value Safety related data protection class IP on the front acc. to IEC 60529 touch protection on the front acc. to IEC 60529 ATEX certificate of suitability ATEX IECEX hardware fault tolerance acc. to IEC 61508 relating to	Siemens type: 3VA52, max. 250 A; Iq max = 65 kA Type: Class RK5 / K5, max. 400 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA 50 hp 50 hp 100 hp IP00; IP20 with cover finger-safe, for vertical contact from the front with cover
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL usable for High Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value Safety related data protection class IP on the front acc. to IEC 60529 touch protection on the front acc. to IEC 60529 ATEX certificate of suitability ATEX IECEX hardware fault tolerance acc. to IEC 61508 relating to ATEX PFDavg with low demand rate acc. to IEC 61508	Siemens type: 3VA52, max. 250 A; Iq max = 65 kA Type: Class RK5 / K5, max. 400 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA 50 hp 50 hp 100 hp IP00; IP20 with cover finger-safe, for vertical contact from the front with cover Yes Yes
manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL usable for High Faults at 460/480 V according to UL of the fuse usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value at 460/480 V at 50 °C rated value Safety related data protection class IP on the front acc. to IEC 60529 touch protection on the front acc. to IEC 60529 ATEX certificate of suitability ATEX IECEX hardware fault tolerance acc. to IEC 61508 relating to ATEX	Siemens type: 3VA52, max. 250 A; Iq max = 65 kA Type: Class RK5 / K5, max. 400 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA 50 hp 50 hp 100 hp IP00; IP20 with cover finger-safe, for vertical contact from the front with cover Yes Yes Yes 0
manufacturer's article number	Siemens type: 3VA52, max. 250 A; Iq max = 65 kA Type: Class RK5 / K5, max. 400 A; Iq = 10 kA Type: Class J, max. 350 A; Iq = 100 kA 50 hp 50 hp 100 hp IP00; IP20 with cover finger-safe, for vertical contact from the front with cover Yes Yes 0 0.09

to ATEX

T1 value for proof test interval or service life acc. to IEC 61508 relating to ATEX

3 y

Certificates/ approvals

General Product Approval

For use in hazardous locations













Declaration of Conformity

Test Certificates

other



Miscellaneous

Type Test Certificates/Test Report Type Test
Certificates/Test
Report

Confirmation

Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5056-2AB04

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5056-2AB04

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5056-2AB04

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5056-2AB04&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5056-2AB04/char


Characteristic: Installation altitude


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5056-2AB04&objecttype=14&gridview=view1

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

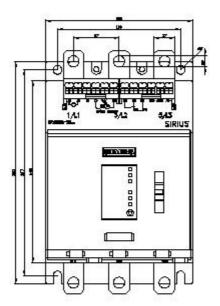

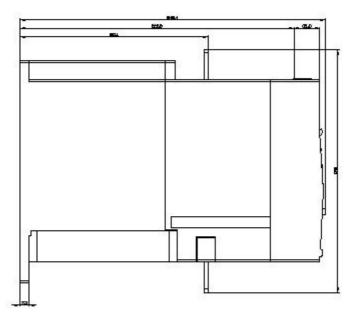

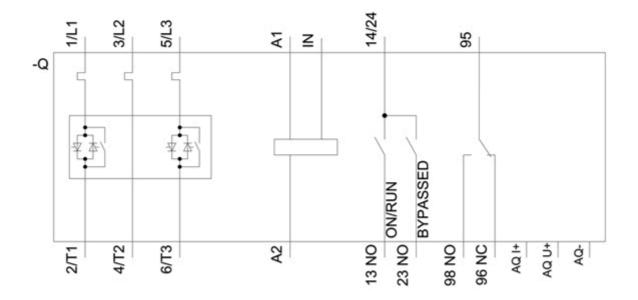

last modified: 12/15/2020 🖸