## **SIEMENS**

Data sheet 3RW30 37-1BB14



SIRIUS SOFT STARTER, SIZE S2, 63A, 30KW/400V, 40 DEGREES, 200-480V AC, 110-230V AC/DC, SCREW TERMINALS

Compared to alterial data			
General technical data	SIRIUS		
product brandname			
<ul> <li>Product equipment Integrated bypass contact</li> </ul>	Yes		
system			
<ul> <li>Product feature Thyristors</li> </ul>	Yes		
Product function			
<ul> <li>Intrinsic device protection</li> </ul>	No		
<ul> <li>motor overload protection</li> </ul>	No		
<ul> <li>Evaluation of thermistor motor protection</li> </ul>	No		
External reset	No		
<ul> <li>Adjustable current limitation</li> </ul>	No		
Inside-delta circuit	No		
Product component Motor brake output	No		
Equipment marking acc. to DIN EN 61346-2	Q		
Equipment marking acc. to DIN 40719 extended	G		
according to IEC 204-2 acc. to IEC 750			
Power Electronics			
Product designation	Soft starter		

Operating current		
• at 40 °C rated value	Α	63
• at 50 °C rated value	Α	58
• at 60 °C rated value	Α	53
Mechanical power output for three-phase motors		
● at 230 V		
— at standard circuit at 40 °C rated value	W	18 500
● at 400 V		
— at standard circuit at 40 °C rated value	W	30 000
Yielded mechanical performance [hp] for three-phase AC motor at 200/208 V at standard circuit at 50 °C rated value	hp	15
Operating frequency rated value	Hz	50 60
Relative negative tolerance of the operating frequency	%	-10
Relative positive tolerance of the operating frequency	%	10
Operating voltage at standard circuit rated value	V	200 480
Relative negative tolerance of the operating voltage at standard circuit	%	-15
Relative positive tolerance of the operating voltage at standard circuit	%	10
Minimum load [% of IM]	%	10
Continuous operating current [% of le] at 40 °C	%	115
Power loss [W] at operating current at 40 °C during operation typical	W	12
Control electronics		
Type of voltage of the control supply voltage		AC/DC
Control supply voltage frequency 1 rated value	Hz	50
Control supply voltage frequency 2 rated value	Hz	60
Relative negative tolerance of the control supply voltage frequency	%	-10
514 4 4 54 4 1	0/	40

Control electronics		
Type of voltage of the control supply voltage		AC/DC
Control supply voltage frequency 1 rated value	Hz	50
Control supply voltage frequency 2 rated value	Hz	60
Relative negative tolerance of the control supply voltage frequency	%	-10
Relative positive tolerance of the control supply voltage frequency	%	10
Control supply voltage 1 at AC at 50 Hz	V	110 230
Control supply voltage 1 at AC at 60 Hz	V	110 230
Relative negative tolerance of the control supply voltage at AC at 60 Hz	%	-10
Relative positive tolerance of the control supply voltage at AC at 60 Hz	%	10
Control supply voltage 1 at DC	V	110 230
Relative negative tolerance of the control supply voltage at DC	%	-10
Relative positive tolerance of the control supply voltage at DC	%	10

Display version for fault signal		red
Mechanical data		
Size of engine control device		S2
Width	mm	55
Height	mm	160
Depth	mm	170
Mounting type		screw and snap-on mounting
Mounting position		With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° tiltable to the front and back
Required spacing with side-by-side mounting		
• upwards	mm	60
• at the side	mm	30
• downwards	mm	40
Wire length maximum	m	300
Number of poles for main current circuit		3
Connections/Terminals		
Type of electrical connection		
• for main current circuit		screw-type terminals
<ul> <li>for auxiliary and control current circuit</li> </ul>		screw-type terminals
Number of NC contacts for auxiliary contacts		0
Number of NO contacts for auxiliary contacts		1
Number of CO contacts for auxiliary contacts		0
Type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point		
• solid		2x (1.5 16 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>		1.5 25 mm²
• stranded		1.5 35 mm²
Type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point		
• solid		2x (1.5 16 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>		1.5 25 mm²
• stranded		1.5 35 mm²
Type of connectable conductor cross-sections for main contacts for box terminal using both clamping points		
• solid		2x (1.5 16 mm²)
finely stranded with core end processing		2x (1.5 16 mm²)
• stranded		2x (1.5 25 mm²)
Type of connectable conductor cross-sections at		
AWG conductors for main contacts for box terminal		

<ul> <li>using the back clamping point</li> </ul>	16 2	
<ul> <li>using the front clamping point</li> </ul>	18 2	
<ul> <li>using both clamping points</li> </ul>	2x (16 2)	
Type of connectable conductor cross-sections for auxiliary contacts		
• solid	2x (0.5 2.5 mm²)	
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²)	
Type of connectable conductor cross-sections at AWG conductors		
• for auxiliary contacts	2x (20 14)	
<ul> <li>for auxiliary contacts finely stranded with core end processing</li> </ul>	2x (20 16)	

Ambient conditions				
Installation altitude at height above sea level	m	5 000		
Environmental category				
<ul> <li>during transport acc. to IEC 60721</li> </ul>		3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6		
• during storage acc. to IEC 60721		3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6		
<ul> <li>during operation acc. to IEC 60721</li> </ul>		3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6		
Ambient temperature	_			
during operation	°C	-25 <b>+</b> 60		
during storage	°C	-40 +80		
Derating temperature	°C	40		
Protection class IP		IP00		

## Certificates/approvals

General Product Approval	EMC	Declaration of
		Conformity













Test Certificates		other			Railway
Type Test Certificates/Test Report	Special Test Certificate	Miscellaneous	Environmental Confirmations	Confirmation	Vibration and Shock

UL/CSA ratings			
Yielded mechanical performance [hp] for three-phase			
AC motor			
● at 220/230 V			
— at standard circuit at 50 °C rated value	hp	20	
● at 460/480 V			
— at standard circuit at 50 °C rated value	hp	40	
Contact rating of auxiliary contacts according to UL		B300 / R300	

## Further information

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW3037-1BB14


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW3037-1BB14

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RW3037-1BB14

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW3037-1BB14&lang=en">http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW3037-1BB14&lang=en</a>







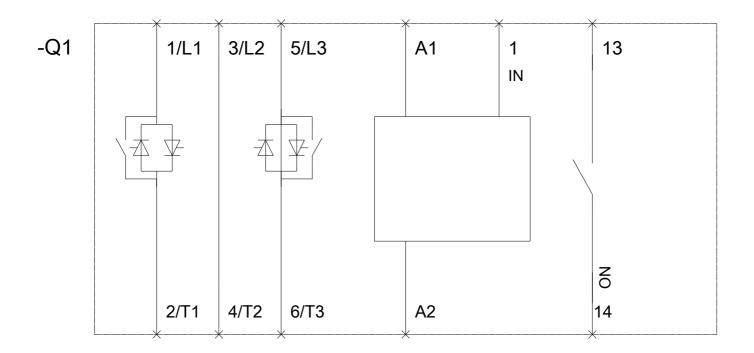

last modified: 07/20/2017