SIEMENS

Data sheet 3RW4047-1BB04



SIRIUS soft starter S3 106 A, 55 kW/400 V, 40 $^{\circ}\text{C}$ 200-480 V AC, 24 V AC/DC Screw terminals

General technical data		
product brand name		SIRIUS
product feature		
 integrated bypass contact system 		Yes
thyristors		Yes
product function		
 intrinsic device protection 		Yes
 motor overload protection 		Yes
 evaluation of thermistor motor protection 		No
 external reset 		Yes
 adjustable current limitation 		Yes
• inside-delta circuit		No
product component motor brake output		No
insulation voltage rated value	V	600
degree of pollution		3, acc. to IEC 60947-4-2
reference code acc. to DIN EN 61346-2		Q
reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		G
Power Electronics		
product designation		Soft starter
operational current		
 at 40 °C rated value 	Α	106
 at 50 °C rated value 	Α	98
at 60 °C rated value	Α	90
yielded mechanical performance for 3-phase motors		
• at 230 V		
 — at standard circuit at 40 °C rated value 	W	30 000
• at 400 V		
— at standard circuit at 40 °C rated value	W	55 000
yielded mechanical performance [hp] for 3-phase AC motor at 200/208 V at standard circuit at 50 °C rated value	hp	30
operating frequency rated value	Hz	50 60
relative negative tolerance of the operating frequency	%	-10
relative positive tolerance of the operating frequency	%	10
operating voltage at standard circuit rated value	V	200 480
relative negative tolerance of the operating voltage at standard circuit	%	-15
Standard Circuit		

standard circuit	_	
minimum load [%]	- %	20
adjustable motor current for motor overload	- 70 A	46
protection minimum rated value	, ,	10
continuous operating current [% of le] at 40 °C	%	115
power loss [W] at operational current at 40 °C during	W	21
operation typical		
Control circuit/ Control		
type of voltage of the control supply voltage		AC/DC
control supply voltage frequency 1 rated value	Hz -	50
control supply voltage frequency 2 rated value	Hz -	60
relative negative tolerance of the control supply voltage frequency	%	-10
relative positive tolerance of the control supply voltage frequency	%	10
control supply voltage 1 at AC		
at 50 Hz rated value	V	24
at 60 Hz rated value	V	24
relative negative tolerance of the control supply voltage at AC at 50 Hz	%	-20
relative positive tolerance of the control supply voltage at AC at 50 Hz	%	20
relative negative tolerance of the control supply voltage at AC at 60 Hz	%	-20
relative positive tolerance of the control supply voltage at AC at 60 Hz	%	20
control supply voltage 1 at DC rated value	V	24
relative negative tolerance of the control supply voltage at DC	%	-20
relative positive tolerance of the control supply voltage at DC	%	20
display version for fault signal		red
Mechanical data		
size of engine control device	-	S3
width	mm	70
height	mm	170
depth	mm	190
fastening method	_	screw and snap-on mounting
mounting position		With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t
required spacing with side-by-side mounting		
• upwards	mm	60
• at the side	mm	30
downwards	mm	40
wire length maximum	m	300
number of poles for main current circuit		3
Connections/ Terminals		
type of electrical connection		
• for main current circuit		screw-type terminals
for auxiliary and control circuit		screw-type terminals
for auxiliary and control circuit number of NC contacts for auxiliary contacts		screw-type terminals 0
for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts		screw-type terminals 0 2
for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts		screw-type terminals 0
for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts		screw-type terminals 0 2
for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front		screw-type terminals 0 2
for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point		screw-type terminals 0 2 1

type of connectable conductor cross-sections for		
main contacts for box terminal using the back clamping point		
• solid		2x (2.5 16 mm²)
 finely stranded with core end processing 		2.5 50 mm²
• stranded		10 70 mm²
type of connectable conductor cross-sections for main contacts for box terminal using both clamping points		
• solid		2x (2.5 16 mm²)
 finely stranded with core end processing 		2x (2.5 35 mm²)
• stranded		2x (10 50 mm²)
type of connectable conductor cross-sections at AWG cables for main contacts for box terminal		
 using the back clamping point 		2x (10 1/0)
 using the front clamping point 		2x (10 1/0)
 using both clamping points 		10 2/0
type of connectable conductor cross-sections for DIN cable lug for main contacts		
 finely stranded 		2 x (10 50 mm²)
• stranded		2x (10 70 mm²)
type of connectable conductor cross-sections for auxiliary contacts		
• solid		2x (0.5 2.5 mm²)
 finely stranded with core end processing 		2x (0.5 1.5 mm²)
type of connectable conductor cross-sections at AWG cables		
for main contacts		2x (7 1/0)
 for auxiliary contacts 		2x (20 14)
for auxiliary contacts finely stranded with core end		2x (20 16)
processing Ambient conditions		
installation altitude at height above sea level	m	5 000
environmental category	111	3 000
		2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
 during transport acc. to IEC 60721 during storage acc. to IEC 60721 		1K6 (only occasional condensation), 1C2 (no salt mist),
		1S2 (sand must not get inside the devices), 1M4
 during operation acc. to IEC 60721 		3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
ambient temperature		
during operation	°C	-25 +60
during storage	°C	-40 +80
derating temperature	°C	40
protection class IP		IP00
Certificates/ approvals		

General Product Approval















For use in hazardous Declaration of Conformity locations	Test Certificates	Marine / Shipping
--	-------------------	-------------------



Miscellaneous



Special Test Certificate

Type Test Certificates/Test Report



Marine / Shipping

other

Railway





Confirmation

Vibration and Shock

UL/CSA ratings		
yielded mechanical performance [hp] for 3-phase AC motor		
• at 220/230 V		
 at standard circuit at 50 °C rated value 	hp	30
• at 460/480 V		
 at standard circuit at 50 °C rated value 	hp	75
contact rating of auxiliary contacts according to UL		B300 / R300
Funda an information		

Further information

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4047-1BB04

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4047-1BB04


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW4047-1BB04


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW4047-1BB04&lang=en

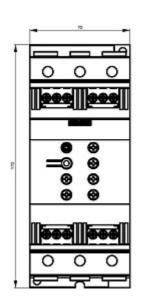

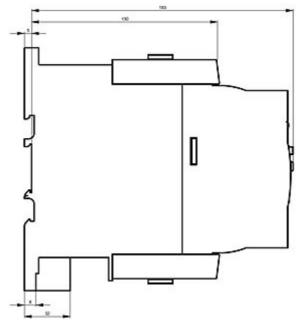



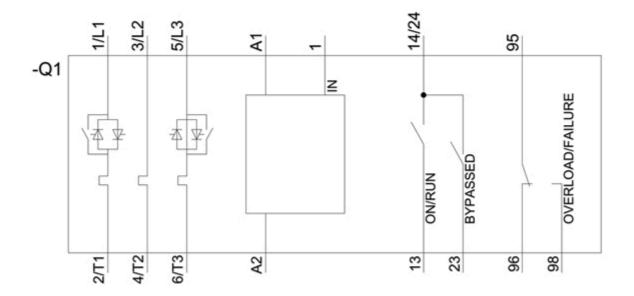

last modified: 12/15/2020 🖸