SIEMENS

Data sheet 3RW4047-2TB04



SIRIUS soft starter S3 106 A, 55 kW/400 V, 40 $^{\circ}\text{C}$ 200-480 V AC, 24 V AC/DC spring-type terminals Thermistor motor protection

General technical data				
product brand name		SIRIUS		
product feature				
 integrated bypass contact system 		Yes		
thyristors		Yes		
product function				
 intrinsic device protection 		Yes		
 motor overload protection 		Yes		
 evaluation of thermistor motor protection 		Yes		
 external reset 		Yes		
 adjustable current limitation 		Yes		
inside-delta circuit		No		
product component motor brake output		No		
insulation voltage rated value	V	600		
degree of pollution		3, acc. to IEC 60947-4-2		
reference code acc. to DIN EN 61346-2		Q		
reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		G		
Power Electronics				
product designation		Soft starter		
operational current				
 at 40 °C rated value 	Α	106		
 at 50 °C rated value 	Α	98		
at 60 °C rated value	Α	90		
yielded mechanical performance for 3-phase motors				
• at 230 V				
 — at standard circuit at 40 °C rated value 	W	30 000		
• at 400 V				
— at standard circuit at 40 °C rated value	W	55 000		
yielded mechanical performance [hp] for 3-phase AC motor at 200/208 V at standard circuit at 50 °C rated value	hp	30		
operating frequency rated value	Hz	50 60		
relative negative tolerance of the operating frequency	%	-10		
relative positive tolerance of the operating frequency	%	10		
operating voltage at standard circuit rated value	V	200 480		
relative negative tolerance of the operating voltage at standard circuit	%	-15		
Standard Circuit				

standard circuit	_	
minimum load [%]	%	20
adjustable motor current for motor overload	- 70 A	46
protection minimum rated value	/ \	10
continuous operating current [% of le] at 40 °C	%	115
power loss [W] at operational current at 40 °C during	W	21
operation typical		
Control circuit/ Control		
type of voltage of the control supply voltage		AC/DC
control supply voltage frequency 1 rated value	Hz	50
control supply voltage frequency 2 rated value	Hz -	60
relative negative tolerance of the control supply voltage frequency	%	-10
relative positive tolerance of the control supply voltage frequency	%	10
control supply voltage 1 at AC		
 at 50 Hz rated value 	V	24
at 60 Hz rated value	V	24
relative negative tolerance of the control supply voltage at AC at 50 Hz	%	-20
relative positive tolerance of the control supply voltage at AC at 50 Hz	%	20
relative negative tolerance of the control supply voltage at AC at 60 Hz	%	-20
relative positive tolerance of the control supply voltage at AC at 60 Hz	%	20
control supply voltage 1 at DC rated value	V	24
relative negative tolerance of the control supply voltage at DC	%	-20
relative positive tolerance of the control supply voltage at DC	%	20
displacements for for the total		and
display version for fault signal		red
Mechanical data		red
Mechanical data size of engine control device		S3
Mechanical data size of engine control device width	mm	\$3 70
Mechanical data size of engine control device width height	mm	\$3 70 170
Mechanical data size of engine control device width height depth	-	S3 70 170 190
Mechanical data size of engine control device width height depth fastening method	mm	S3 70 170 190 screw and snap-on mounting
Mechanical data size of engine control device width height depth	mm	S3 70 170 190
Mechanical data size of engine control device width height depth fastening method	mm	S3 70 170 190 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting
Mechanical data size of engine control device width height depth fastening method mounting position	mm	S3 70 170 190 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting
Mechanical data size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting	mm mm	S3 70 170 190 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards	mm mm	S3 70 170 190 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum	mm mm	S3 70 170 190 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t 60 30 40 300
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum number of poles for main current circuit	mm mm mm mm	S3 70 170 190 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum number of poles for main current circuit Connections/ Terminals	mm mm mm mm	S3 70 170 190 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t 60 30 40 300
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum number of poles for main current circuit Connections/ Terminals type of electrical connection	mm mm mm mm	S3 70 170 190 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t 60 30 40 300 3
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum number of poles for main current circuit Connections/ Terminals type of electrical connection • for main current circuit	mm mm mm mm	S3 70 170 190 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t 60 30 40 300 3 screw-type terminals
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting	mm mm mm mm	S3 70 170 190 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t 60 30 40 300 3 screw-type terminals spring-loaded terminals
Mechanical data size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting	mm mm mm mm	S3 70 170 190 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t 60 30 40 300 3 screw-type terminals spring-loaded terminals 0
Mechanical data size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting	mm mm mm mm	S3 70 170 190 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t 60 30 40 300 3 screw-type terminals spring-loaded terminals 0 2
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting	mm mm mm mm	S3 70 170 190 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t 60 30 40 300 3 screw-type terminals spring-loaded terminals 0
Mechanical data size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting	mm mm mm mm	S3 70 170 190 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t 60 30 40 300 3 screw-type terminals spring-loaded terminals 0 2
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting	mm mm mm mm	S3 70 170 190 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t 60 30 40 300 3 screw-type terminals spring-loaded terminals 0 2
size of engine control device width height depth fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum number of poles for main current circuit Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point	mm mm mm mm	S3 70 170 190 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t 60 30 40 300 3 screw-type terminals spring-loaded terminals 0 2

type of connectable conductor cross-sections for main contacts for box terminal using the back		
clamping point		
• solid		2x (2.5 16 mm²)
 finely stranded with core end processing 		2.5 50 mm²
stranded		10 70 mm²
type of connectable conductor cross-sections for main contacts for box terminal using both clamping points		
• solid		2x (2.5 16 mm²)
 finely stranded with core end processing 		2x (2.5 35 mm²)
• stranded		2x (10 50 mm²)
type of connectable conductor cross-sections at AWG cables for main contacts for box terminal		
 using the back clamping point 		2x (10 1/0)
 using the front clamping point 		2x (10 1/0)
 using both clamping points 		10 2/0
type of connectable conductor cross-sections for DIN cable lug for main contacts		
finely stranded		2 x (10 50 mm²)
• stranded		2x (10 70 mm²)
type of connectable conductor cross-sections for auxiliary contacts		
• solid		2x (0.25 2.5 mm²)
 finely stranded with core end processing 		2x (0.25 1.5 mm²)
type of connectable conductor cross-sections at AWG cables		
for main contacts		2x (7 1/0)
for auxiliary contacts		2x (24 14)
Ambient conditions		
installation altitude at height above sea level	m	5 000
environmental category		
 during transport acc. to IEC 60721 		2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
• during storage acc. to IEC 60721		1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
during operation acc. to IEC 60721		3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
ambient temperature		
 during operation 	°C	-25 + 60
during storage	°C	-40 +80
derating temperature	°C	40
protection class IP		IP00

General Product Approval















For use in hazardous locations

Declaration of Conformity

Test Certificates

Marine / Shipping



Miscellaneous

Type Test Certificates/Test Report

Special Test Certificate





Marine / Shipping other Railway



Confirmation

Vibration and Shock

UL/CSA ratings				
yielded mechanical performance [hp] for 3-phase AC motor				
• at 220/230 V				
 at standard circuit at 50 °C rated value 	hp	30		
• at 460/480 V				
 at standard circuit at 50 °C rated value 	hp	75		
contact rating of auxiliary contacts according to UL		B300 / R300		
Fruith an information				

Further information

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4047-2TB04

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4047-2TB04


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW4047-2TB04


 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW4047-2TB04&lang=en







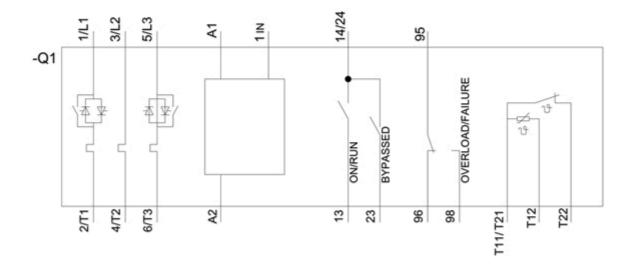

last modified: 12/15/2020 🖸