

(€





## **Model Number**

#### ML100-55/103/115b

Retroreflective sensor with fixed cable and M12 connector, 4-pin


### **Features**

- Miniature design
- Easy to use
- · Full metal thread mounting
- Clearly visible LEDs for Power ON, switching state and weak signal indication
- Not sensitive to ambient light


# **Product information**

The ML100 series is characterized by its miniature housing with integral, all-metal threaded bushings. All versions are equipped with a visible red transmitter LED. This greatly simplifies installation and commissioning. The switching states are easily visible from all directions thanks to the highly visible LEDs.

## **Dimensions**

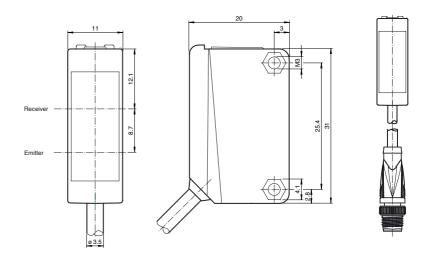

## **Electrical connection**



- O = Light on
- = Dark on


#### **Pinout**

Wire colors in accordance with EN 60947-5-2



1	BN	(brown
2	WH	(white)
3	BU	(blue)
4	BK	(black)

## Indicators/operating means



1	Light-Dark-switching	
2	Sensitivity adjuster	
3	Signal display	yellow
4	Operating display	green



Technical data		
General specifications		
Effective detection range		0 5 m
Reflector distance		0.01 5 m
Threshold detection range		7 m
Reference target		H50 reflector
Light source		LED
Light type		modulated visible red light
Polarization filter		yes
Diameter of the light spot		approx. 500 mm at a distance of 7 m
Angle of divergence		approx. 4 °
Optical face		frontal
Ambient light limit		EN 60947-5-2:2007+A1:2012
Functional safety related param	neters	
MTTF <sub>d</sub>		860 a
Mission Time (T <sub>M</sub> )		20 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
Operation indicator		LED green: power on
Function indicator		LED yellow: lights up when receiving the light beam; flashes when falling short of the stability control; OFF when light beam is interrupted
Control elements		sensitivity adjustment
Control elements		Light-on/dark-on changeover switch
Electrical specifications		
Operating voltage	$U_B$	10 30 V DC
Ripple		max. 10 %
No-load supply current	I <sub>0</sub>	< 20 mA
Output		
Switching type		The switching type of the sensor is adjustable. The default setting is: light on
Signal output		1 PNP output, short-circuit protected, reverse polarity protected, open collector
Switching voltage		max. 30 V DC
Switching current	- 11	max. 100 mA , resistive load
Voltage drop	U <sub>d</sub>	≤ 1.5 V DC 1000 Hz
Switching frequency Response time		0.5 ms
Ambient conditions		0.5 1115
Ambient temperature		-30 60 °C (-22 140 °F)
Storage temperature		-40 70 °C (-40 158 °F)
Mechanical specifications		-40 70 0 (-40 130 1 )
Degree of protection		IP67
Connection		300 mm fixed cable with 4-pin, M12 x 1 connector
Material		ood minninged dable with 4 pm, with X 1 connector
Housing		PC (Polycarbonate)
Optical face		PMMA
Mass		approx. 20 g
Tightening torque, fastening scre	ews.	0.6 Nm
Cable length	,,,,	0.3 m
Compliance with standards and	d directi	<b> -</b>
ves	u uoo	•
Directive conformity		
EMC Directive 2004/108/EC		EN 60947-5-2:2007+A1:2012
Standard conformity		
Standards		UL 60947-5-2
Approvals and certificates		TD 011 000 /0044
EAC conformity		TR CU 020/2011
UL approval		cULus Listed, Class 2 Power Source or listed Power Supply with a limited voltage output with (maybe integrated) fuse (max. 3.3 A according UL248), Type 1 enclosure

## **Accessories**

## OMH-F10-ML100

Mounting aid for ML100 series

#### OMH-ML100-01

Mounting aid for ML100 series, Mounting bracket

#### OMH-ML100-02

Mounting aid for ML100 series, Mounting bracket

#### OMH-ML100-03

Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm

#### OMH-ML100-04

Mounting aid for ML100 series, Mounting bracket

#### OMH-ML100-05

Mounting aid for ML100 series, Mounting bracket

#### OMH-10

Mounting aid

#### **REF-H85-2**

Reflector, rectangular 84.5 mm x 84.5 mm, mounting holes

#### REF-C110-2

Reflector, round ø 84 mm, central mounting hole

#### **REF-H60-2**

Reflector with mounting holes

Reflector, rectangular 51 mm x 61 mm, mounting holes, fixing strap

### REF-H33

Reflector with screw fixing

# OFR-70-2

Reflective tape 70 mm x 70 mm

## OMH-ML100-S1

Mounting bracket

# OMH-ML100-08

Mounting aid for ML100 series, Snap-in

Other suitable accessories can be found at www.pepperl-fuchs.com

PEPPERL+FUCHS

CCC approval

CCC approval / marking not required for products rated ≤36 V

# **Curves/Diagrams**

