


# RB3500



## Incremental encoder with solid shaft

INCREMENTAL ENCODER BASIC LINE

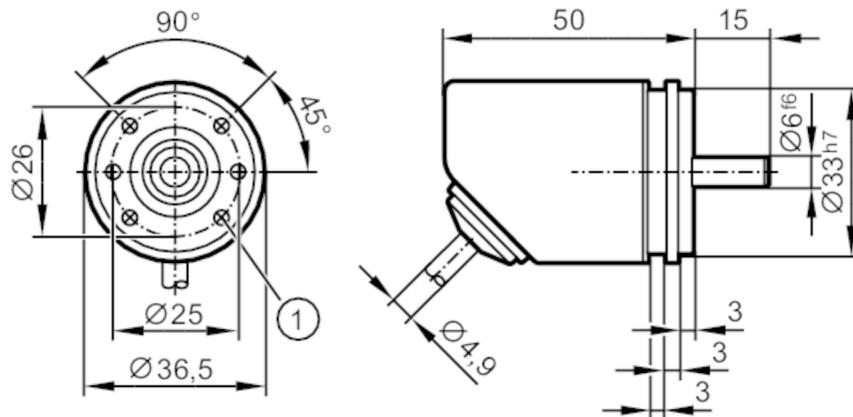

1 M3 x 0.5 Depth 6 mm



### Application

Function principle	incremental
Detection system	magnetic

### Electrical data

Operating voltage [V]	4.75...30 DC
Current consumption [mA]	< 150
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	0.5
Max. revolution electrical [U/min]	12000

### Outputs

Electrical design	HTL/TTL
Switching frequency [kHz]	1000
Factory setting	Output function: HTL (50 mA)
Short-circuit protection	yes
Phase difference A und B [°]	90

### Measuring/setting range

Resolution	1...10000; (configurable; Factory setting: 1024) resolution
------------	---

### Accuracy / deviations

Accuracy [°]	0.1
--------------	-----

### Software / programming

Parameter setting options	Resolution; Direction of rotation; HTL; TTL
---------------------------	---

### Interfaces

Communication interface	IO-Link
Transmission type	COM 2
IO-Link revision	1.1
SIO mode	yes
Min. process cycle time [ms]	2.3

# RB3500



## Incremental encoder with solid shaft

INCREMENTAL ENCODER BASIC LINE

### Operating conditions

Ambient temperature	[°C]	-40...80
Note on ambient temperature		for flexibly laid cable: -25 °C
Storage temperature	[°C]	-40...80
Max. relative air humidity	[%]	95; (Condensation not permissible)
Protection		IP 65; IP 66; (on the housing: IP 67; on the shaft: IP 64)

### Tests / approvals

Shock resistance		200 g
Vibration resistance		30 g
MTTF	[years]	292

### Mechanical data

Weight	[g]	284.2
Dimensions	[mm]	Ø 36.5 / L = 65
Material		flange: aluminum; housing: stainless steel (1.4521 / 444); cable plug: PA
Max. revolution, mechanical	[U/min]	12000
Max. starting torque	[Nm]	1
Reference temperature torque	[°C]	20
Shaft design		solid shaft
Shaft diameter	[mm]	6
Shaft material		stainless steel
Max. shaft load axial (at the shaft end)	[N]	40
Max. shaft load radial (at the shaft end)	[N]	60

### Electrical connection

Cable: 2 m, Ø 4.9 mm; Maximum cable length: 100 m; radial, can also be used axially; 5 x 0.14 mm<sup>2</sup>

### IO-Link

brown	L+
white	not to be used
blue	L-
grey	not to be used
black	IO-Link
screen	housing

### encoder

brown	UB
white	A
blue	GND
grey	B
black	Z/0-Pulse (90 deg)
screen	housing

# RB3500




## Incremental encoder with solid shaft

INCREMENTAL ENCODER BASIC LINE

### Diagrams and graphs

Pulse diagram

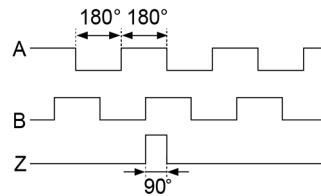

Direction of rotation clockwise (looking at the shaft)